



Наличие и актуальные цены на

**HBG-100-48DA**

<https://www.mean-well.ru/store/HBG-100-48DA/>



User's Manual


**IP65 IP67**  
(CCC optional)

IS 15885(Part 2/Sec13)  
R-41027766  
(for 36A, 48A, 60A only)


## Features

- Constant Current mode output
- Circular metal housing with class I design
- Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer; 3 in 1 dimming; DALI
- Typical lifetime>50000 hours
- 5 years warranty

## Applications

- LED bay lighting
- LED stage lighting
- LED spot lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

## GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## Description

HBG-100 series is a 100W AC/DC LED driver featuring the circular shape design. It operates from 90~305VAC and offers the constant current output models with different rated voltage between 24V and 60V. Thanks to the high efficiency up to 91.5%, with the fanless design, the entire series is able to operate for -40℃ ~ +85℃ case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HBG-100 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

## Model Encoding

**HBG - 100 - 36 A**

Function mode option  
Rated output voltage(24/36/48/60V)  
Rated wattage  
Series name

Type	IP Level	Function	Note
Blank	IP67	Io fixed.	In Stock
A	IP65	Io adjustable through built-in potentiometer.	In Stock
B	IP67	3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
AB	IP65	Io adjustable through built-in potentiometer with 3 in 1 dimming function	In Stock
DA	IP67	DALI control technology.	In Stock




## 100W Constant Current Mode LED Driver

## HBG-100 series

## SPECIFICATION


MODEL		HBG-100-24		HBG-100-36		HBG-100-48		HBG-100-60		
OUTPUT	RATED CURRENT	4A		2.7A		2A		1.6A		
	RATED POWER	96W		97.2W		96W		96W		
	CONSTANT CURRENT REGION <small>Note.2</small>	14.4 ~ 24V		21.6 ~ 36V		28.8 ~ 48V		36 ~ 60V		
	OPEN CIRCUIT VOLTAGE(max.)	25V		37V		49V		62V		
	CURRENT ADJ. RANGE	Adjustable for A/AB-Type (via built-in potentiometer)								
		2.4 ~ 4A		1.62 ~ 2.7A		1.2 ~ 2A		1.0 ~ 1.6A		
	CURRENT RIPPLE	5.0% max. @rated current								
	CURRENT TOLERANCE	±5.0%								
SETUP TIME	<small>Note.4</small>	2000ms / 115VAC		500ms / 230VAC						
INPUT	VOLTAGE RANGE	<small>Note.3</small>	90 ~ 305VAC    127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)							
	FREQUENCY RANGE		47 ~ 63Hz							
	POWER FACTOR		PF>0.96/115VAC, PF>0.96/230VAC, PF>0.94/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)							
	TOTAL HARMONIC DISTORTION		THD< 20% (@load≥60%/115VAC, 230VAC; @load≥75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)							
	EFFICIENCY (Typ.)	<small>Note.5</small>	90.5%		91%		91%		91.5%	
	AC CURRENT (Typ.)		1.1A / 115VAC		0.5A / 230VAC		0.45A / 277VAC			
	INRUSH CURRENT (Typ.)		COLD START 60A(twidth=550μs measured at 50% Ipeak) at 230VAC; Per NEMA 410							
	MAX. No. of PSUs on 16A CIRCUIT BREAKER		4 units (circuit breaker of type B) / 8 units (circuit breaker of type C) at 230VAC							
	LEAKAGE CURRENT		<0.75mA / 277VAC							
PROTECTION	OVER CURRENT		95 ~ 108% Constant current limiting							
	OVER VOLTAGE		28 ~ 35V		41 ~ 49V		54 ~ 63V		65 ~ 75V	
			Shut down o/p voltage re-power on to recovery							
	OVER TEMPERATURE		Shut down o/p voltage re-power on to recovery							
ENVIRONMENT	WORKING TEMP.		Tcase=-40 ~ +85℃ (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)							
	MAX. CASE TEMP.		Tcase=+85℃							
	WORKING HUMIDITY		20 ~ 95% RH non-condensing							
	STORAGE TEMP., HUMIDITY		-40 ~ +80℃, 10 ~ 95% RH							
	TEMP. COEFFICIENT		±0.03%/℃ (0 ~ 50℃)							
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes							
SAFETY & EMC	SAFETY STANDARDS		UL8750(type"HL"),CSA C22.2 No.250.13-12, ENEC BS EN/EN61347-1,BS EN/EN61347-2-13 independent, BS EN/EN62384; GB19510.1,GB19510.14, BIS IS15885(for 36A,48A,60A only), EAC TP TC 004,IP65 or IP67 approved							
	DALI STANDARDS		Compliance to IEC62386-101, 102, 207 for DA-Type only							
	WITHSTAND VOLTAGE		I/P-O/P:3.75KVAC    I/P-FG:2KVAC    O/P-FG:0.5KVAC							
	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH							
	EMC EMISSION		Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load≥60%); BS EN/EN61000-3-3, GB/T 17743 ,GB17625.1, EAC TP TC 020							
	EMC IMMUNITY		Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547,light industry level (surge immunity:Line-Earth:4KV, Line-Line:2KV), EAC TP TC 020							
OTHERS	MTBF		2433.4K hrs min.    Telcordia SR-332 (Bellcore); 299.3K hrs min.    MIL-HDBK-217F (25℃)							
	DIMENSION		φ 130mm *66.5mm (D * H)							
	PACKING		1.18Kg; 12pcs/15.7Kg/1.43CUFT(Blank/A/B Type),1.89CUFT(E Type)							
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature. 2. Please refer to "DRIVING METHODS OF LED MODULE". 3. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 4. Length of set up time is measured at cold first start. Turning ON/OFF the driver may lead to increase of the set up time. 5. The DA type power supply is less efficient than the typical efficiency in specification by 1%. 6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a> ) 7. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 75℃ or less. 8. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a> 9. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 10. For any application note and IP water proof function installation caution, please refer our user manual before using. <a href="https://www.meanwell.com/Upload/PDF/LED_EN.pdf">https://www.meanwell.com/Upload/PDF/LED_EN.pdf</a> 11. For A/AB type need to consider build-in using or filling the lo adjusting hole with the potting compound to comply with Type HL application. ※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>									

## ■ BLOCK DIAGRAM

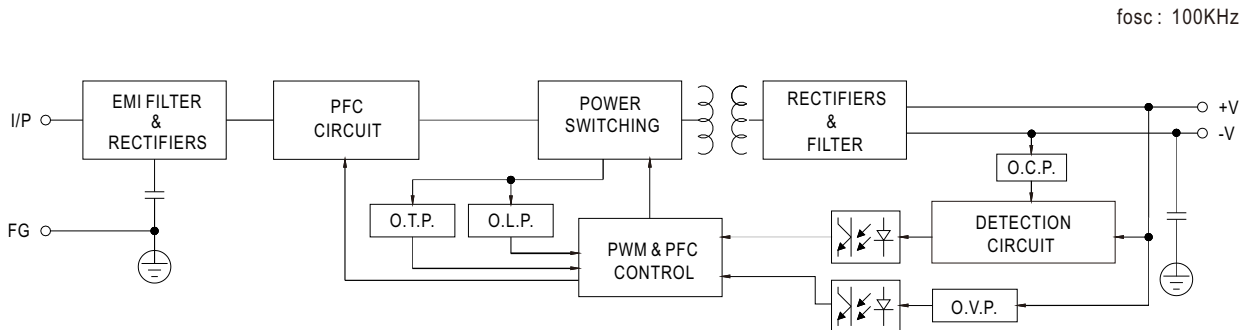

## ■ DRIVING METHODS OF LED MODULE


※ This series works in constant current mode to directly drive the LEDs.

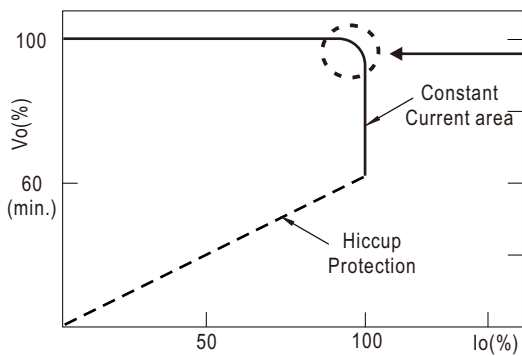

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.  
Should there be any compatibility issues, please contact MEAN WELL.


## DIMMING OPERATION

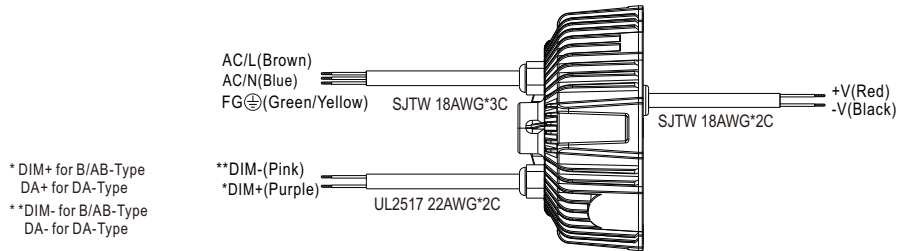


### ※ 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:  
1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 $\mu$ A (typ.)


#### ◎ Applying additive 1 ~ 10VDC

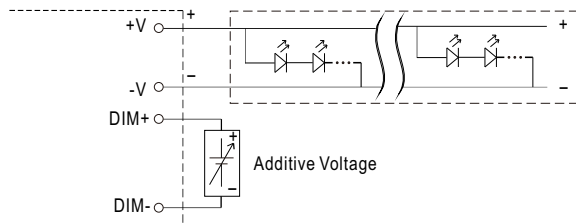


"DO NOT connect "DIM- to -V"

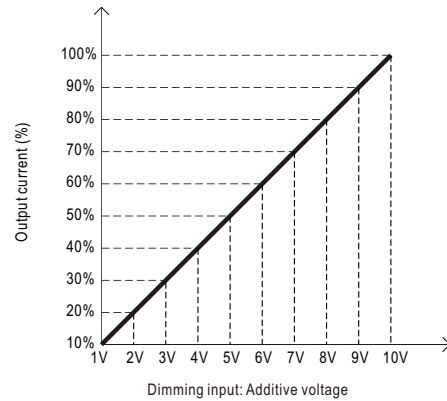


#### ◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

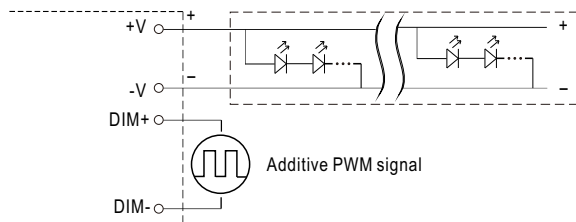


"DO NOT connect "DIM- to -V"

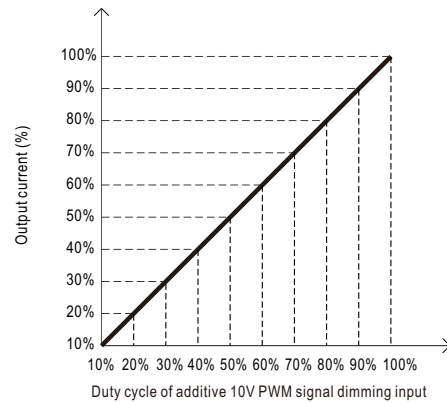


#### ◎ Applying additive resistance:

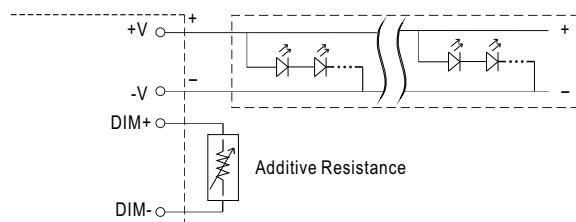

"DO NOT connect "DIM- to -V"

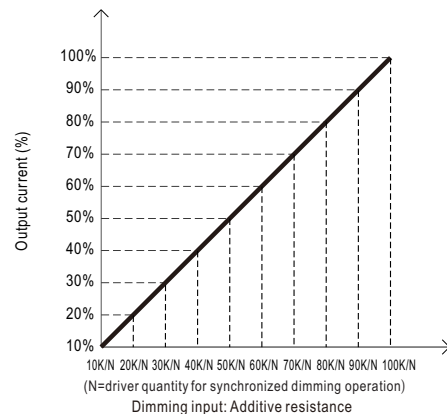

Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.


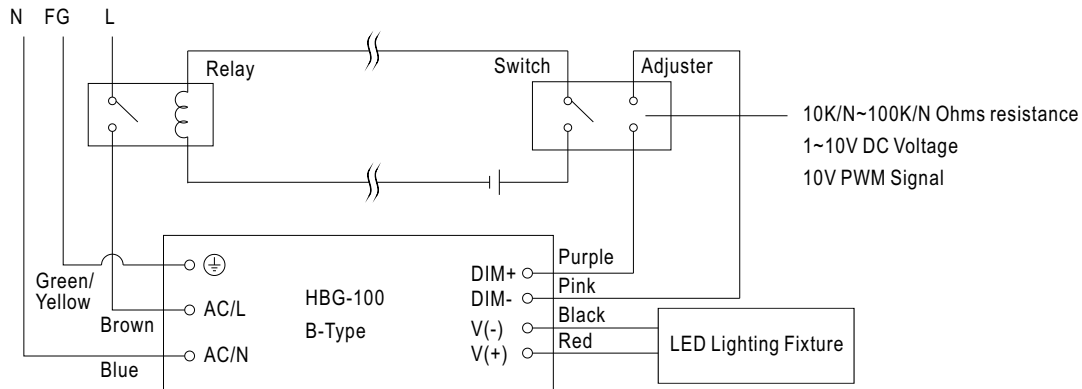


Using a switch and relay can turn ON/OFF the lighting fixture.


※ **DALI Interface (primary side; for DA-Type)**

- Apply DALI signal between DA+ and DA-.
- DALI protocol comprises 16 groups and 64 addresses.
- First step is fixed at 8% of output.

### ■ OUTPUT LOAD vs TEMPERATURE(Note.8)

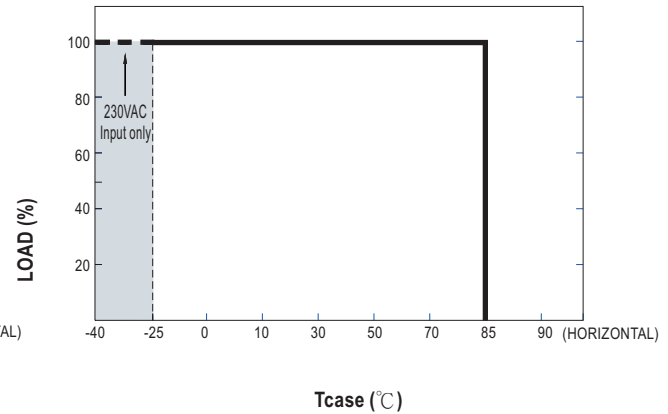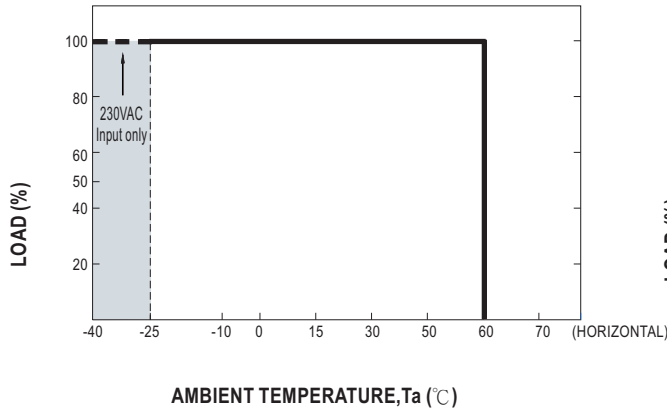


### ■ STATIC CHARACTERISTIC

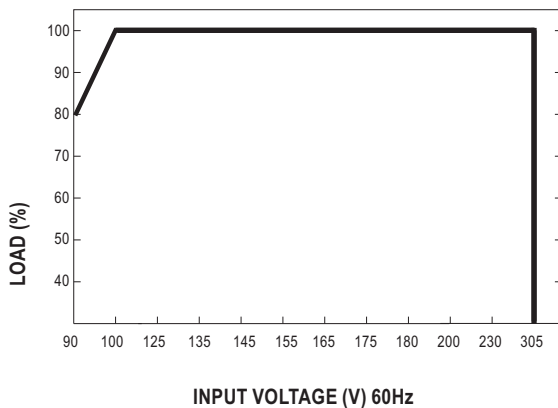

※ De-rating is needed under low input voltage.


### ■ POWER FACTOR (PF) CHARACTERISTIC

※  $T_{case}$  at 75°C

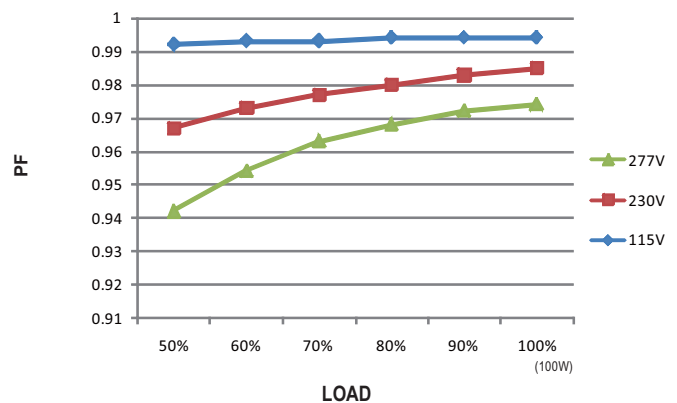

### ■ TOTAL HARMONIC DISTORTION (THD)


※ 48V Model,  $T_{case}$  at 75°C

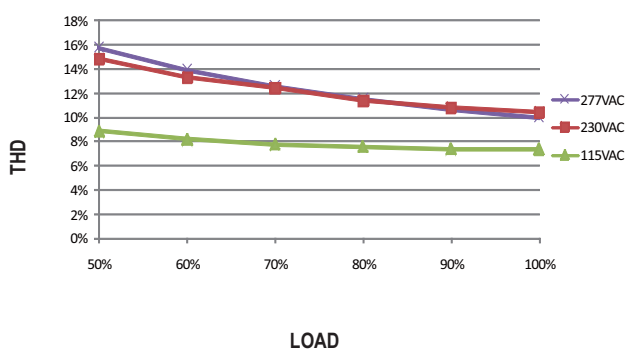


### ■ EFFICIENCY vs LOAD

HBG-100 series possess superior working efficiency that up to 91% can be reached in field applications.

※ 48V Model,  $T_{case}$  at 75°C

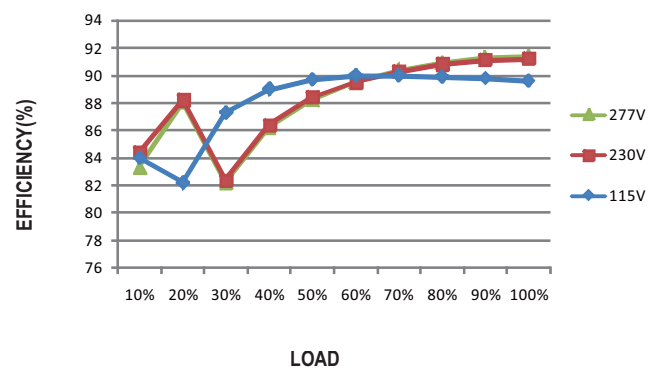

■ LIFE TIME

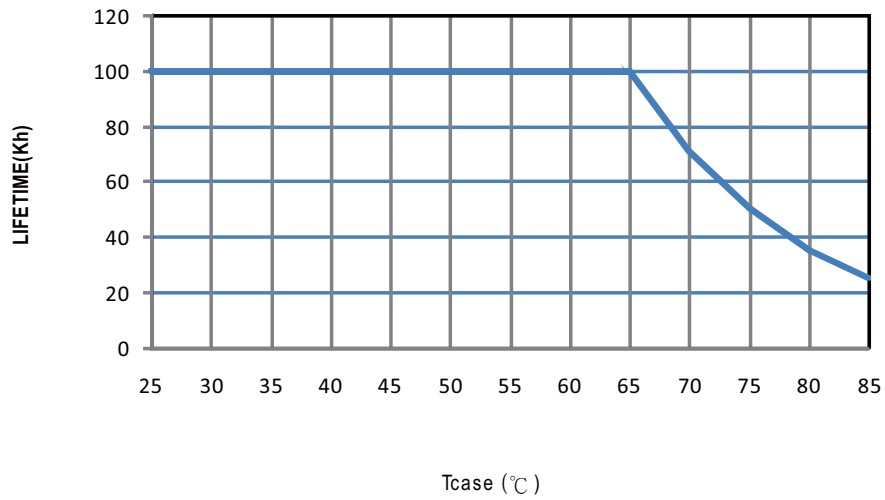




## MECHANICAL SPECIFICATION


Case No.217 Unit:mm Tolerance:±1

### ※ Blank-Type

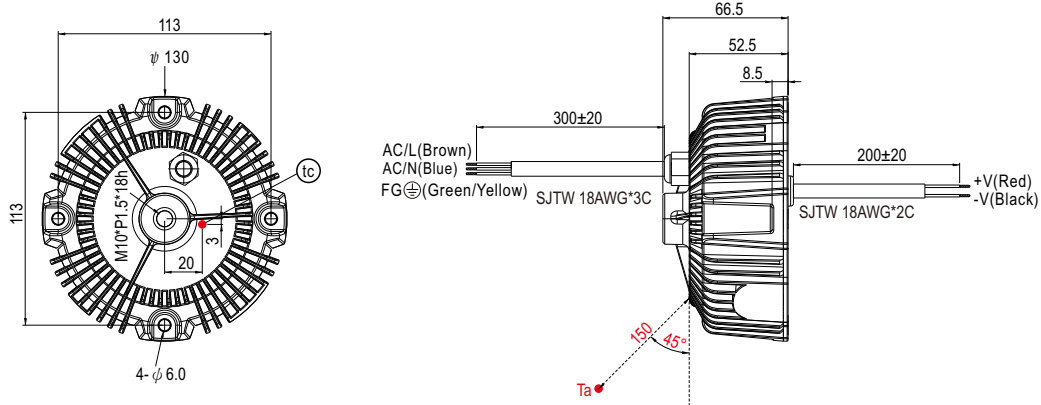


- (tc) : Max. Case Temperature.(case temperature measured point)
- Ta: Ambient Temperature measured point

### ※ A-Type

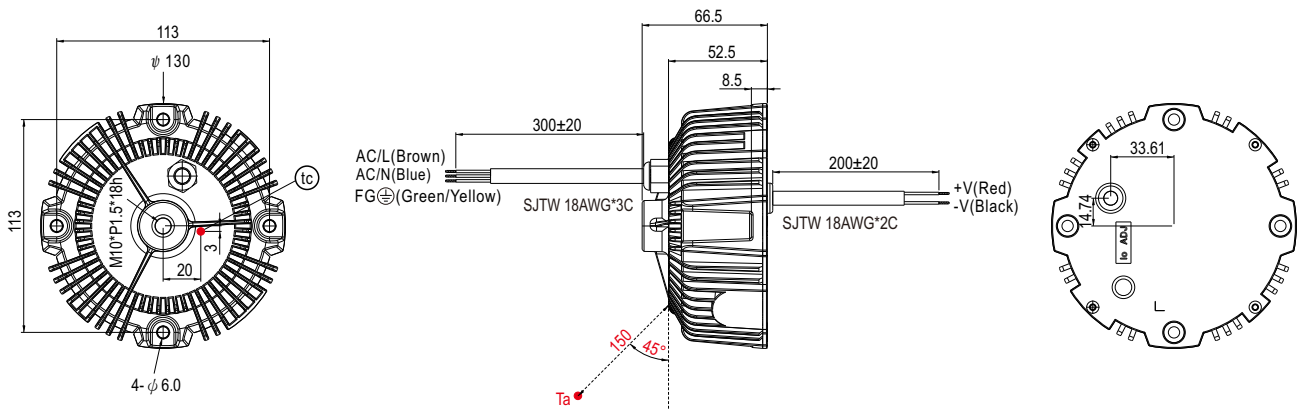


- (tc) : Max. Case Temperature.(case temperature measured point)
- Ta: Ambient Temperature measured point

### ※ B/DA-Type

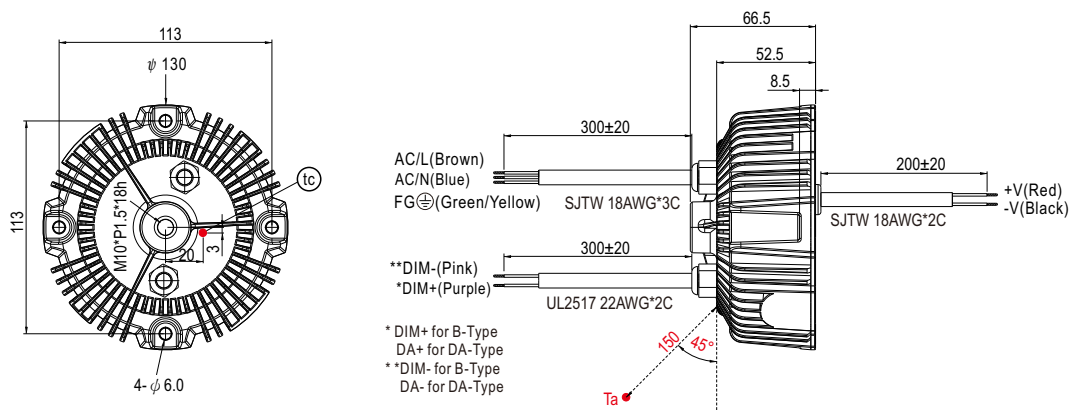


- (tc) : Max. Case Temperature.(case temperature measured point)
- Ta: Ambient Temperature measured point

## ※ AB-Type

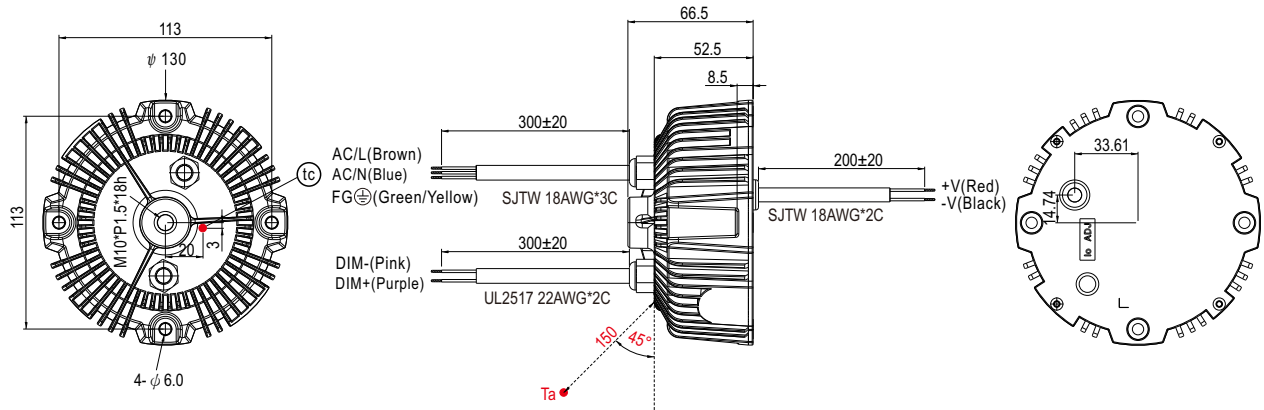

- (tc) : Max. Case Temperature. (case temperature measured point)
- Ta: Ambient Temperature measured point

## ■ INSTALLATIONS

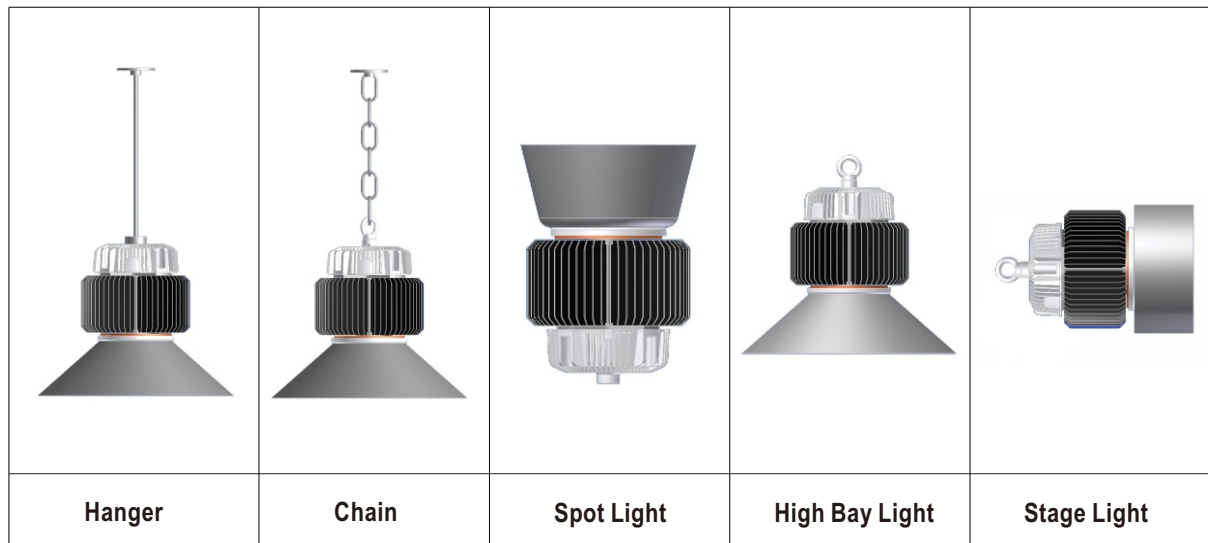

## Caution

- Please inspect the appearance of the driver if the package is damaged. There should not be any cracks.
- Please do not drop or bump the driver.
- All screws including the suspension screw should be paired with a spring washer and locked tight.
- The entire luminaire, including the driver, should be limited to 10Kg or less.
- The luminaire should be cautiously protected from damage due to shock throughout packaging and transportation.
- Please thoroughly follow the preceding cautionary notes to prevent the luminaire from falling, leading to injuries.