



Наличие и актуальные цены на

**ODLC-65-700DA**

<https://www.mean-well.ru/store/ODLC-65-700DA/>



## Features

- Constant Current mode output
- Flicker free design
- Plastic housing with class II design
- Built-in active PFC function
- No load power consumption<0.5W(Blank-Type), Standby power consumption<0.5W(DA-Type)
- IP67 rating for indoor or outdoor installations
- Function options: 2 in 1 dimming (dim-to-off); Auxiliary DC output; DALI
- 3 years warranty

## Applications

- LED panel lighting
- LED flood lighting
- Indoor LED lighting
- Industrial lighting

## GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## Description

ODLC-65 series is a 65W LED AC/DC driver featuring the constant current mode output with flicker free design. ODLC-65 operates from 180~295VAC and offers models with different rated current ranging between 700mA and 1750mA. Thanks to the efficiency up to 88%, with the fanless design, the entire series is able to operate for -20°C~+85°C case temperature under free convection. The design of plastic housing and IP67 ingress protection level allows this series to fit indoor wet applications. ODLC-65 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for lighting system.

## Model Encoding

ODLC - 65 **A** - 1050 ☐

- Function options
- Rated output current(700/1050/1400/1750mA)
- { A:Auxiliary DC output(12V@50mA)
- { ☐:None
- Output wattage
- Series name

| Type  | Function                             | Note     |
|-------|--------------------------------------|----------|
| Blank | 2 in 1 dimming (0~10VDC and 10V PWM) | In Stock |
| DA    | DALI control technology              | In Stock |


Note: The DALI control model(DA Type) only for ODLC-65 Non Auxiliary DC output models.

## SPECIFICATION

| MODEL        |  | ODLC-65□-700□   | ODLC-65□-1050□ | ODLC-65□-1400□ | ODLC-65□-1750□ |
|--------------|--|---|----------------|----------------|----------------|
| OUTPUT       | RATED CURRENT  | 700mA   | 1050mA         | 1400mA         | 1750mA         |
|              | RATED POWER  | 65.1W   | 65.1W          | 64.4W          | 63W            |
|              | CONSTANT CURRENT REGION <small>Note.2</small>  | 69 ~ 93V  | 46 ~ 62V       | 34 ~ 46V       | 27 ~ 36V       |
|              | OPEN CIRCUIT VOLTAGE <sub>(max.)</sub>   | 118V  | 82V            | 60V            | 53V            |
|              | CURRENT RIPPLE   | 5% max. @rated current  |                |                |                |
|              | CURRENT TOLERANCE  | ±7.0%   |                |                |                |
|              | SETUP TIME <small>Note.4</small>   | 500ms / 230VAC  |                |                |                |
|              | AUXILIARY DC OUTPUT <small>Note.5</small>  | Nominal 12V(deviation 11.4~12.6)@50mA for ODLC-65A only   |                |                |                |
| INPUT        | VOLTAGE RANGE <small>Note.3</small>  | 180 ~ 295VAC<br>(Please refer to "STATIC CHARACTERISTIC" section)   |                |                |                |
|              | FREQUENCY RANGE  | 47 ~ 63Hz   |                |                |                |
|              | POWER FACTOR (Typ.)  | PF>0.95/230VAC, PF>0.9/277VAC@full load<br>(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)                                     |                |                |                |
|              | TOTAL HARMONIC DISTORTION  | THD< 20%(@load≥75%/230VAC,277VAC)<br>(Please refer to "TOTAL HARMONIC DISTORTION" section)  |                |                |                |
|              | EFFICIENCY (Typ.)  | 88%   | 87%            | 87%            | 86%            |
|              | AC CURRENT   | 0.4A/230VAC      0.3A/277VAC  |                |                |                |
|              | INRUSH CURRENT (Typ.)  | COLD START 30A(twidth=100μs measured at 50% Ipeak) at 230VAC; Per NEMA 410  |                |                |                |
|              | MAX. No. of PSUs on 16A CIRCUIT BREAKER  | 32 units (circuit breaker of type B) / 32 units (circuit breaker of type C) at 230VAC   |                |                |                |
|              | LEAKAGE CURRENT  | <0.75mA / 277VAC  |                |                |                |
|              | NO LOAD / STANDBY POWER CONSUMPTION  | No load power consumption <0.5W for Blank-Type, <1.2W for ODLC-65A<br>Standby power consumption <0.5W for DA-Type                           |                |                |                |
| PROTECTION   | SHORT CIRCUIT  | Hiccup mode,auto-recovery after fault condition is removed for DA type;<br>Hiccup mode,re-power on to recovery for other type               |                |                |                |
| ENVIRONMENT  | WORKING TEMP.  | Tcase=-20 ~ +85℃ (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)  |                |                |                |
|              | MAX. CASE TEMP.  | Tcase=+85℃  |                |                |                |
|              | WORKING HUMIDITY   | 20 ~ 90% RH non-condensing  |                |                |                |
|              | STORAGE TEMP., HUMIDITY  | -40 ~ +80℃, 10 ~ 95% RH   |                |                |                |
|              | TEMP. COEFFICIENT  | ±0.03%/℃ (0 ~ 45℃)  |                |                |                |
|              | VIBRATION  | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes   |                |                |                |
| SAFETY & EMC | SAFETY STANDARDS   | UL8750(type"HL");CSA C22.2 NO.250.13-12; ENEC BS EN/EN61347-1 & BS EN/EN61347-2-13 independent, BS EN/EN62384; EAC TP TC 004, IP67 approved |                |                |                |
|              | DALI STANDARDS <small>Note.7</small>   | Compliance to IEC62386-101,102 for DA-Type only   |                |                |                |
|              | WITHSTAND VOLTAGE  | I/P-O/P:3.75KVAC  |                |                |                |
|              | ISOLATION RESISTANCE   | I/P-O/P:100M Ohms / 500VDC / 25℃/ 70% RH  |                |                |                |
|              | EMC EMISSION   | Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (≥75% load) ; BS EN/EN61000-3-3, GB17743,GB17625.1,EAC TP TC 020                     |                |                |                |
|              | EMC IMMUNITY   | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level(surge immunity: Line-Line:1KV),EAC TP TC 020              |                |                |                |
| OTHERS       | MTBF   | 4381.7K hrs min.      Telcordia SR-332 (Bellcore) ;402.6K hrs min.      MIL-HDBK-217F (25℃)   |                |                |                |
|              | DIMENSION  | 121*77*28.5mm(L*W*H)  |                |                |                |
|              | PACKING  | 0.43Kg; 24pcs/ 11.3Kg/ 0.74CUFT   |                |                |                |
| NOTE         | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature.<br>2. Please refer to "DRIVING METHODS OF LED MODULE".<br>3. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.<br>4. Length of set up time is measured at cold first start. Turning ON/OFF the driver may lead to increase of the set up time or set up failure<br>5. Aux. 12V will be damaged with short circuit; It will not be available when output voltage is not in constant current region or output no load condition.<br>6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.<br>7. The DALI version driver does not support the bit 1: Lamp failure in the Command 144 Query status of the DALI standard.<br>8. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).<br>9. For any application note and IP water proof function installation caution, please refer our user manual before using.<br>https://www.meanwell.com/Upload/PDF/LED_EN.pdf<br>10. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains.<br>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx |   |                |                |                |


## Block Diagram

fosc : 70KHz

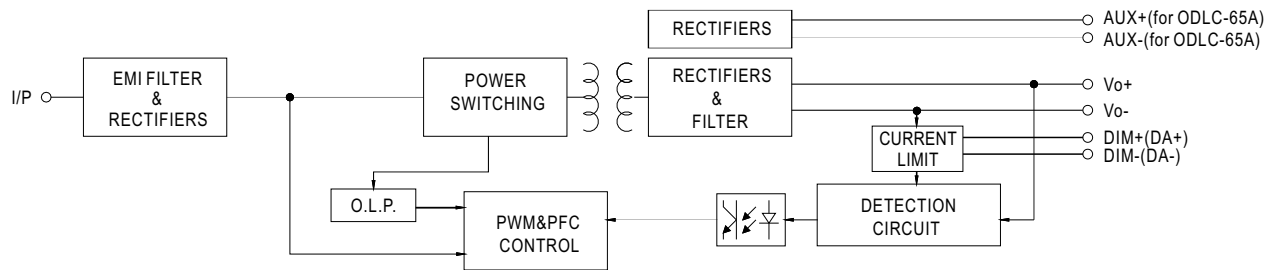

## DRIVING METHODS OF LED MODULE


※ This series works in constant current mode to directly drive the LEDs.

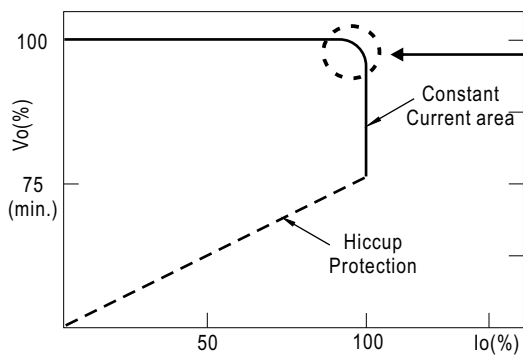

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.  
Should there be any compatibility issues, please contact MEAN WELL.



## DIMMING OPERATION

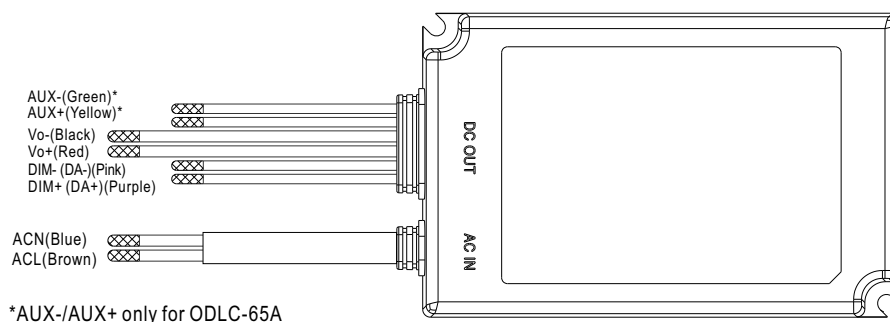



### ※ 2 in 1 dimming function

- Output constant current level can be adjusted by applying one of the two methodologies between DIM+ and DIM-:  
0 ~ 10VDC, or 10V PWM signal.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.

#### ◎ Applying additive 0 ~ 10VDC

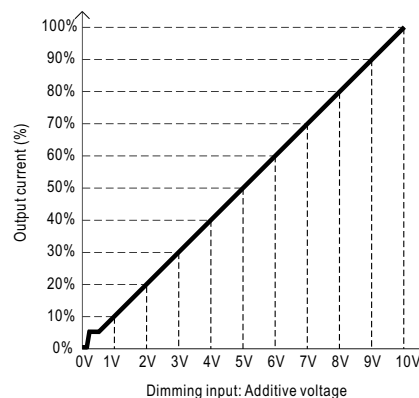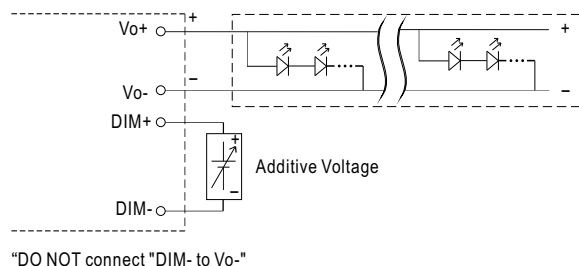

#### ◎ Applying additive 10V PWM signal (frequency range 300Hz ~ 3KHz):

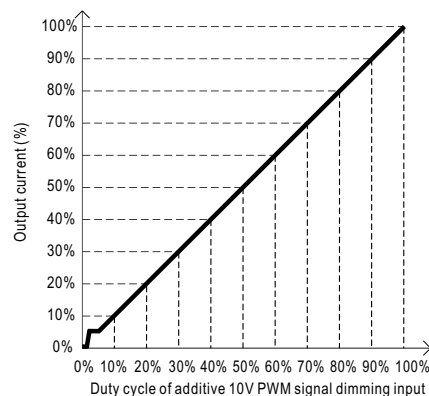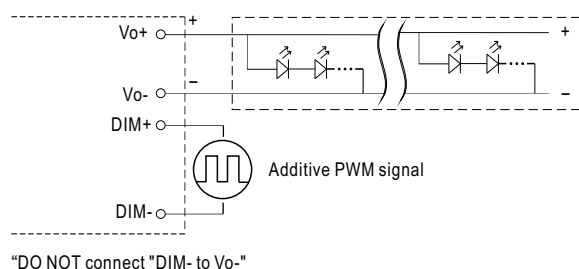



Note : 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle.


### ※ DALI Interface (primary side; for DA-Type)

- Apply DALI signal between DA+ and DA-.
- DALI protocol comprises 16 groups and 64 addresses.
- First step is fixed at 8% of output.

### ■ OUTPUT LOAD vs TEMPERATURE

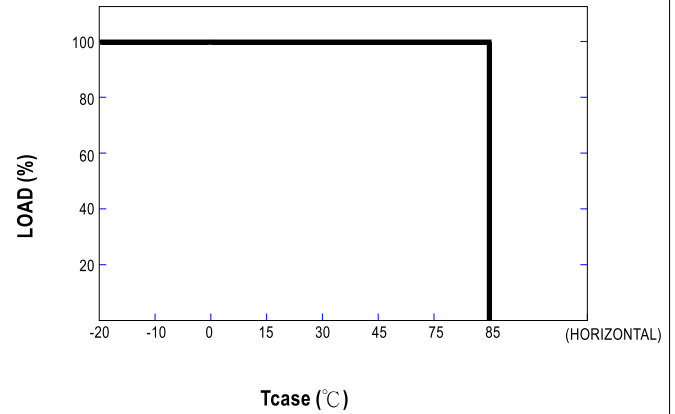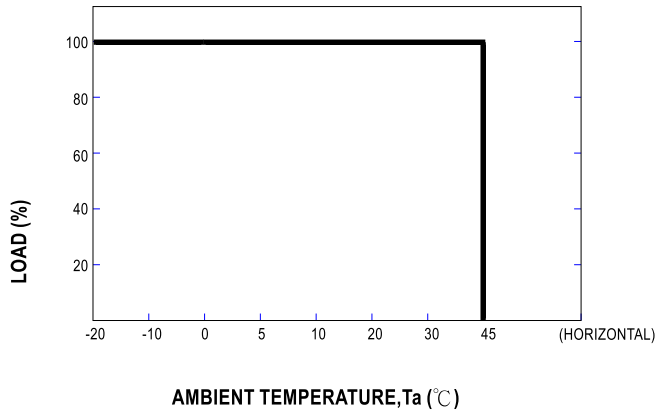


### ■ STATIC CHARACTERISTIC

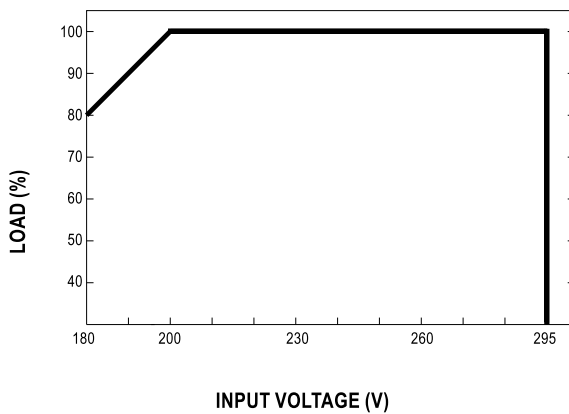

※ De-rating is needed under low input voltage.


### ■ POWER FACTOR (PF) CHARACTERISTIC

※  $T_{case}$  at 75°C

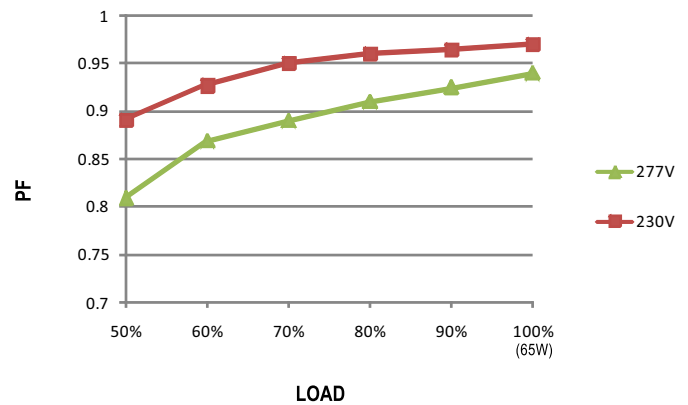

### ■ TOTAL HARMONIC DISTORTION (THD)


※ 700mA Model,  $T_{case}$  at 75°C

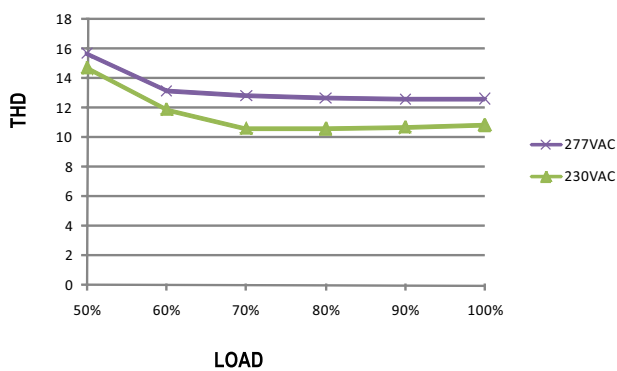

### ■ EFFICIENCY vs LOAD

ODLC-65 series possess superior working efficiency that up to 88% can be reached in field applications.


※ 700mA Model,  $T_{case}$  at 75°C

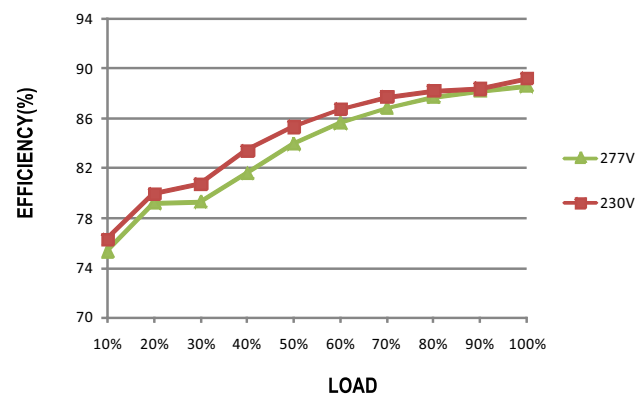

## MECHANICAL SPECIFICATION

Case No.ODL-65A

Unit:mm

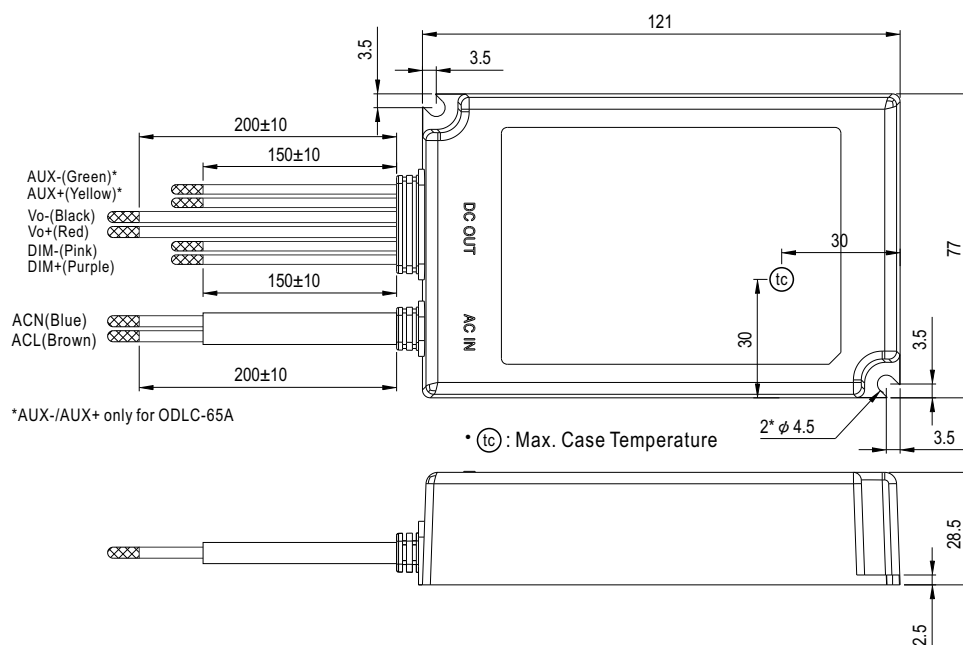

## AC wire No. Assignment(AC IN)

|            |           |
|------------|-----------|
| ACN(Blue)  | SVT 18AWG |
| ACL(Brown) | SVT 18AWG |

## ODLC-65

DC wire No. Assignment(DC OUT)

|                   |              |
|-------------------|--------------|
| Vo-(Black)        | UL1007 18AWG |
| Vo+(Red)          | UL1007 18AWG |
| DIM-(DA-)(Pink)   | UL1007 22AWG |
| DIM+(DA+)(Purple) | UL1007 22AWG |

## ODLC-65A

DC wire No. Assignment(DC OUT)

|              |              |
|--------------|--------------|
| AUX-(Green)  | UL1007 20AWG |
| AUX+(Yellow) | UL1007 20AWG |
| Vo-(Black)   | UL1007 18AWG |
| Vo+(Red)     | UL1007 18AWG |
| DIM-(Pink)   | UL1007 22AWG |
| DIM+(Purple) | UL1007 22AWG |

## ■ INSTALLATION MANUAL

Please refer to :<http://www.meanwell.com/manual.html>