




Наличие и актуальные цены на

XLC-40-H-BS

<https://www.mean-well.ru/store/XLC-40-H-BS/>

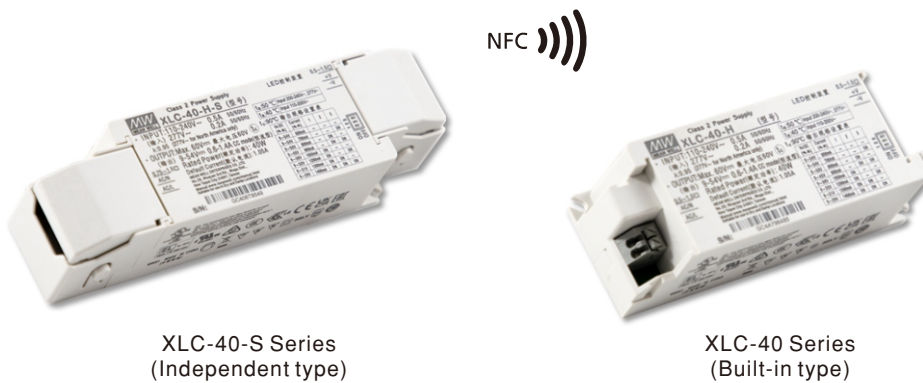

IS 15885



NOTE.14



Features

- Constant power mode output with multiple stage selectable by dip switch or NFC setting (H-type)
- Constant voltage mode output (12V/24V)
- Plastic housing with class II and PFC design
- Meet UL 8750 Class 2 / Class P power unit
- Flicker free, complying with CE ErP directive
- Standby power consumption <0.5W
- Meet emergency lighting (EL) function application
- Minimum dimming level 0.1% (DALI-2 DT6)
- Dimming functions: 3 in 1 dimming (Dim-to-off)
DALI-2 + Push dimming
- 5 years warranty

Applications

- Recessed Light
- Down Light
- Panel Light
- Commercial Lighting
- Decorative Lighting
- LED strip lighting
- DALI digital Lighting


GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

XLC-40 Series is a 40W with constant power and constant voltage output LED driver . It can operate from 100~305VAC and output current ranging between 600 mA to 1400 mA selectable by dip switch or NFC setting. Thanks to high efficiency up to 88%, it is able to operate for -25℃~90℃ case temperature under free air convection. XLC-40 is designed based on latest safety regulations with 3 in 1 and DALI-2 dimming. XLC-40 can also be adjusted for brightness with a push button as a simple way dimming, so it provides more flexibility for LED Lighting application.

Model Encoding

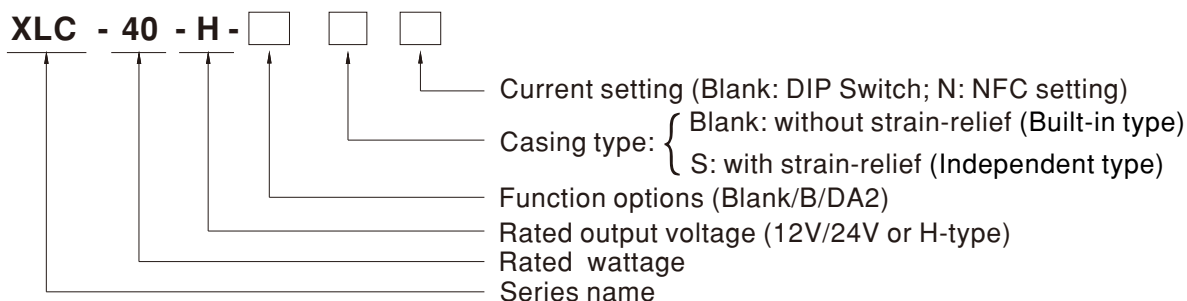

| Type | Function | Note |
|-------|---|----------|
| Blank | H type output current selectable by DIP-switch or NFC setting | In stock |
| | 12, 24V Constant voltage output | |
| B | H type output current selectable by DIP-switch or NFC with 3 in 1 dimming | |
| DA2 | H type output current selectable by DIP-switch or NFC with DALI-2 dimming | |

Note: 1. 12V/24V without dimming function.

2. NFC current setting is available for XLC-40-H type only.


SPECIFICATION

| MODEL | | XLC-40-12-□ | XLC-40-24-□ |
|--------------|---|--|------------------------------------|
| OUTPUT | RATED VOLTAGE | 12V | 24V |
| | RATED CURRENT | 3.4A | 1.7A |
| | RATED POWER Note.2 | 40.8W | 40.8W |
| | RIPPLE & NOISE (max.) Note.3 | 120mVp-p | 240mVp-p |
| | VOLTAGE TOLERANCE Note.4 | ±4.0% | |
| | LINE REGULATION | ±0.5% | |
| | LOAD REGULATION | ±2% | |
| INPUT | SETUP, RISE TIME Note.5 | 500ms, 100ms/230VAC, 1000ms, 100ms/115VAC | |
| | VOLTAGE RANGE | 100 ~ 305VAC 141 ~ 400VDC | |
| | FREQUENCY RANGE | 47 ~ 63Hz | |
| | POWER FACTOR | PF ≥ 0.97/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) | |
| | TOTAL HARMONIC DISTORTION | THD<10%(@load ≥ 50%/230VAC; @load ≥ 75%/277VAC), THD<15%(@load ≥ 50%/115VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section) | |
| | EFFICIENCY (Typ.) | 86% | 88% |
| | AC CURRENT | 0.5A / 115VAC 0.25A / 230VAC 0.2A/277VAC | |
| PROTECTION | INRUSH CURRENT(Typ.) | COLD START 10A(twidth=100μs measured at 50% Ipeak) at 230VAC; Per NEMA 410 | |
| | MAX. No. of PSUs on 16A CIRCUIT BREAKER | 51 units (circuit breaker of type B) / 51 units (circuit breaker of type C) at 230VAC | |
| | LEAKAGE CURRENT | <0.75mA / 277VAC | |
| | OVER LOAD | 105 ~ 220% rated output power Protection type:Hiccup mode , recovers automatically after fault condition is removed | |
| | SHORT CIRCUIT | Hiccup mode, recovers automatically after fault condition is removed | |
| | OVER VOLTAGE | 13 ~ 16V | 26 ~ 32V |
| | OVER TEMPERATURE | Shut down output voltage, recovers automatically after fault condition is removed | |
| ENVIRONMENT | WORKING TEMP. | Tcase=-25 ~ 90℃ (Please refer to " OUTPUT LOAD vs TEMPERATURE" section) | |
| | MAX. CASE TEMP. | Tcase=90℃ | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +80℃, 10 ~ 95% RH | |
| | TEMP. COEFFICIENT | ±0.03%/℃ (0 ~ 50℃) | |
| SAFETY & EMC | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | |
| | SAFETY STANDARDS | ENEC BS EN/EN61347-1, BS EN/EN61347-2-13(EL) appendix J suitable for emergency installations(DC input 176-280VDC); BS EN/EN62384, BIS IS15885(Part2/Sec13)(NOTE 14), GB/T19510.1, GB/T19510.213, EAC TP TC 004,UL8750(Class P); CSA C22.2 No. 250.13-12 approved; Design refer to AS/NZS 61347-1, AS/NZS 61347-2-13 | |
| | WITHSTAND VOLTAGE | I/P-O/P:3.75KVAC | |
| | ISOLATION RESISTANCE | I/P-O/P:>100M Ohms / 500VDC / 25℃ / 70% RH | |
| | EMC EMISSION | Parameter | Standard |
| | | Conducted | BS EN/EN55015(CISPR15) ,GB/T 17743 |
| | | Radiated | BS EN/EN55015(CISPR15) ,GB/T 17743 |
| | | Harmonic Current | BS EN/EN61000-3-2 , GB17625.1 |
| | EMC IMMUNITY | Voltage Flicker | BS EN/EN61000-3-3 |
| | | BS EN/EN61547 | |
| | | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| | | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| | | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| | | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| OTHERS | FLICKER Note.6 | PstLM ≤ 1, SVM ≤ 0.4 | |
| | MTBF | 3935.2 K hrs min. Telcordia SR-332 (Bellcore) ; 342.9 Khrs min. MIL-HDBK-217F (25℃) | |
| | DIMENSION | 147*40*32mm,107*40*32mm (L*W*H) | |
| | PACKING | 190g; 60pcs/12.6Kg/0.58CUFT(for blank type); 207g; 50pcs/11.5Kg/0.57CUFT(for S-type) | |
| NOTE | | <p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature.</p> <p>2. De-rating may be need under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.</p> <p>3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.</p> <p>4. Tolerance: includes set up tolerance, line regulation and load regulation.</p> <p>5. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.</p> <p>6. Flicker is measured at full load with the light source provided by MEAN WELL.</p> <p>7. To fulfill requirement of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.</p> <p>8. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)</p> <p>9. The ambient temperature de-rating of 3.5℃/1000m with fanless models and 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>10. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (Ta) point (or TMP, per DLC), is about 75℃ or less.</p> <p>11. For XLC-S series: RCM is on a voluntary basis. Non IC classification Independent LED control gear is not suitable for residential installations. For XLC(except -S) series: RCM is on a voluntary basis and meets relevant IEC or AS/NZS standards complying with AS/NZS 4417.1.</p> <p>12. Products sourced from the Americas regions may not have the CCC/PSE/BIS/KC logo. Please contact your MEAN WELL sales for more information.</p> <p>13. For more information, please contact with MEAN WELL sales.</p> <p>14. Products sourced from the China regions and some models sourced from India may not have the BIS logo,please refer to BIS certificate for details and contact your MEAN WELL sales for more information.</p> <p>※Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p> | |

SPECIFICATION

| | | | |
|------------------|---|--|---|
| MODEL | | XLC-40-H- <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | |
| OUTPUT | OPEN CIRCUIT VOLTAGE | Note.2 | 60V |
| | DEFAULT CURRENT | | 1050mA |
| | CURRENT ADJ. RANGE (BY DIP SWITCH OR NFC) | | 0.6~1.4A |
| | CONSTANT CURRENT REGION | Note.3 | 9~54V |
| | RATED POWER | Note.4 | 40W |
| | CURRENT RIPPLE | | <4%(@full load) |
| | CURRENT TOLERANCE | | ±5% |
| | DIMMING RANGE | | 0~100% |
| SETUP, RISE TIME | | Note.5,6 | 500ms, 100ms/230VAC, 1000ms, 100ms/115VAC |
| INPUT | VOLTAGE RANGE | | 100 ~ 305VAC 141 ~ 400VDC |
| | FREQUENCY RANGE | | 47 ~ 63Hz |
| | POWER FACTOR | | PF ≥ 0.97/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) |
| | TOTAL HARMONIC DISTORTION | | THD<10%(@load ≥ 50%/230VAC; @load ≥ 75%/277VAC), THD<15%(@load ≥ 50%/115VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section) |
| | EFFICIENCY (Typ.) | Note.7 | 88% |
| | AC CURRENT | | 0.5A / 115VAC 0.25A / 230VAC 0.2A/277VAC |
| | INRUSH CURRENT(Typ.) | | COLD START 10A(twidth=100μs measured at 50% Ipeak) at 230VAC; Per NEMA 410 |
| | MAX. No. of PSUs on 16A CIRCUIT BREAKER | | 51 units (circuit breaker of type B) / 51 units (circuit breaker of type C) at 230VAC |
| PROTECTION | LEAKAGE CURRENT | | <0.75mA / 277VAC |
| | STANDBY POWER CONSUMPTION | Note.8 | Standby power consumption<0.5W(Dimming off) |
| | SHORT CIRCUIT | | Hiccup mode, recovers automatically after fault condition is removed |
| | OVER TEMPERATURE | | Blank & B type: De-rating to lowest output level. Recovers automatically after fault condition is removed. DA2 type: Stage 1: De-rating to 75% loading; Stage 2: De-rating to 50% loading. Recovers automatically after fault condition is removed. |
| | WORKING TEMP. | | Tcase=-25 ~ 90℃ (Please refer to " OUTPUT LOAD vs TEMPERATURE" section) |
| | MAX. CASE TEMP. | | Tcase=90℃ |
| | WORKING HUMIDITY | | 20 ~ 90% RH non-condensing |
| | STORAGE TEMP., HUMIDITY | | -40 ~ +80℃, 10 ~ 95% RH |
| ENVIRONMENT | TEMP. COEFFICIENT | | ±0.03%/℃ (0 ~ 50℃) |
| | VIBRATION | | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes |
| | SAFETY STANDARDS | | ENEC BS EN/EN61347-1, BS EN/EN61347-2-13(EL) appendix J suitable for emergency installations(DC input 176-280VDC); BS EN/EN62384, BIS IS15885(Part2/Sec13)(NOTE 14), GB/T19510.1, GB/T19510.213, EAC TP TC 004,UL8750(Class P); CSA C22.2 No. 250.13-12 approved; Design refer to AS/NZS 61347-1, AS/NZS 61347-2-13 |
| | DALI STANDARDS | | Comply with IEC62386-101,102,207 |
| | WITHSTAND VOLTAGE | | I/P-O/P:3.75KVAC |
| | ISOLATION RESISTANCE | | I/P-O/P:>100M Ohms / 500VDC / 25℃ / 70% RH |
| | EMC EMISSION | Parameter | Standard |
| | | Conducted | BS EN/EN55015(CISPR15) ,GB/T 17743 |
| | | Radiated | BS EN/EN55015(CISPR15) ,GB/T 17743 |
| | | Harmonic Current | BS EN/EN61000-3-2 , GB17625.1 |
| SAFETY & EMC | EMC IMMUNITY | Voltage Flicker | BS EN/EN61000-3-3 |
| | | BS EN/EN61547 | |
| | | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| | EMC IMMUNITY | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| | | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| OTHERS | FLICKER | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| | | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |
| | MTBF | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| | | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| NOTE | DIMENSION | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| | | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| | PACKING | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |
| | | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| NOTE | PstLM ≤ 1, SVM ≤ 0.4 | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| | | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| | 3935.2 K hrs min. Telcordia SR-332 (Bellcore) ; 342.9 Khrs min. MIL-HDBK-217F (25℃) | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| | | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |
| NOTE | 147*40*32mm,107*40*32mm (L*W*H) | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| | | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| | 193g; 60pcs/12.58Kg/0.58CUFT(for blank type); 210g; 50pcs/11.5Kg/0.57CUFT(for S-type) | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| | | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| NOTE | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature. | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |
| | | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| | 2. Output hiccups under no-load condition. | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| | | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| NOTE | 3. Please refer to "DRIVER METHODS OF LED MODULE". | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| | | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |
| | 4. De-rating may be need under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| | | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| NOTE | 5. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| | | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| | 6. Based on IEC 62386-101/102 DALI power on timing and interruption regulations, the set up time needs to test with a DALI controller which can support for DALI power on function, otherwise the startup time will be higher than 0.5 second. | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |
| | | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| NOTE | 7. Efficiency is measured at 800mA/50V output set by dip-switch or NFC. | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| | | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| | 8. Standby power consumption is measured at 230VAC. | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| | | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |
| NOTE | 9. Flicker is measured at full load with the light source provided by MEAN WELL. | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| | | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| | 10. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| | | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| NOTE | 11. For XLC-S series: RCM is on a voluntary basis. Non IC classification Independent LED control gear is not suitable for residential installations. For XLC(except -S) series: RCM is on a voluntary basis and meets relevant IEC or AS/NZS standards complying with AS/NZS 4417.1 | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |
| | | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| | 12. The ambient temperature de-rating of 3.5℃/1000m with fanless models and 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| | | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| NOTE | 13. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (Tc point (or TMP, per DLC), is about 75℃ or less. | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| | | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |
| | 14. Products sourced from the China regions and some models sourced from India may not have the BIS logo,please refer to BIS certificate for details and contact your MEAN WELL sales for more information. | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| | | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| NOTE | 15. To fulfill requirements of the latest ErP regulation for lighting fixture, this LED driver can only be used behind a switch without permanently connected to the mains. | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| | | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| | 16. Products sourced from the Americas regions may not have the CCC/PSE/BIS/KC logo. Please contact your MEAN WELL sales for more information. | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |
| | | Parameter | Standard |
| | | ESD | BS EN/EN61000-4-2 |
| NOTE | 17. For more information, please contact with MEAN WELL sales. | Radiated | BS EN/EN61000-4-3 |
| | | EFT/Burst | BS EN/EN61000-4-4 |
| | | Surge | BS EN/EN61000-4-5 |
| | | Conducted | BS EN/EN61000-4-6 |
| | ※Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx | Magnetic Field | BS EN/EN61000-4-8 |
| | | Voltage Dips and Interruptions | BS EN/EN61000-4-11 |
| | | 70% residual voltage for 10 period, 0% residual voltage for 0.5 periods | |
| | | Test Level/Note | |

BLOCK DIAGRAM

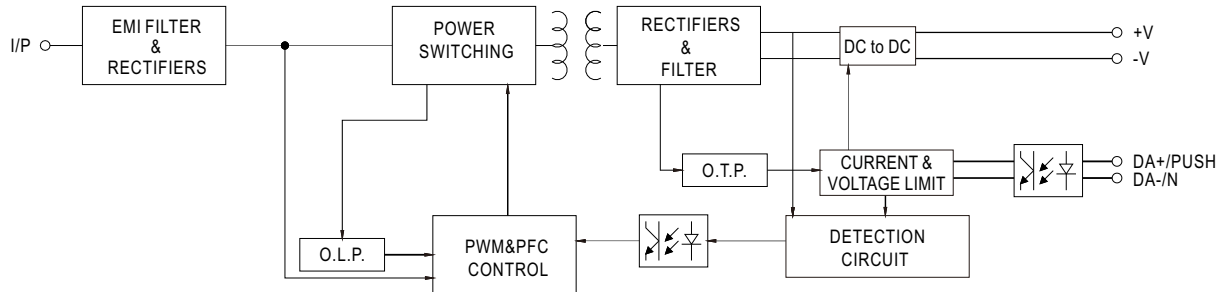


DRIVING METHODS OF LED MODULE

※ I-V Operating Area

◎ XLC-40-H

For 40W application

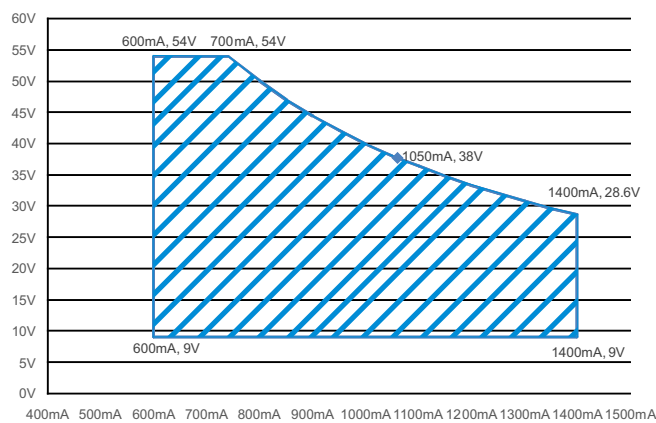

CONSTANT POWER TABLE

XLC-40-H is a multiple-stage constant power driver, selection of output current through DIP switch or NFC setting is exhibited below.

| Vo | Io | DIP S.W | | |
|-------|-----------------|---------|------|------|
| | | 1 | 2 | 3 |
| 9~54V | 600mA | ---- | ---- | ---- |
| 9~54V | 700mA | ---- | ---- | ON |
| 9~50V | 800mA | ---- | ON | ---- |
| 9~45V | 900mA | ---- | ON | ON |
| 9~38V | 1050mA(default) | ON | ---- | ---- |
| 9~33V | 1200mA | ON | ---- | ON |
| 9~31V | 1300mA | ON | ON | ---- |
| 9~29V | 1400mA | ON | ON | ON |

Note: The operating voltage range which show on this table is recommend to use.

NFC Function Description

1. The output current of the NFC Mode LED driver can be adjusted using NFC via the mobile APP.

Operation Instruction:

● Compatible phone

Install an NFC-compatible smart mobile device or phone with AndroidTM 4.1 or IOS12 updates.

● Steps for setting output current via NFC

1. Download Meanwell APP on mobile device or mobile phone, and enable NFC function.

2. Check the NFC antenna position of the mobile phone please.

3. Enter Meanwell APP -> Top left menu -Installation Manual/APP->PowerNFC, approach the LED driver NFC sensing position and perform sensing.


4. APP displays the functional parameters, and the relevant parameters are modified as required.

5. Tap the APP write button and quickly move the phone antenna close to the NFC sensing position of the LED driver.

6. The write completes when the mobile phone displays "Success".

APP Function Description

※ APP Interface:

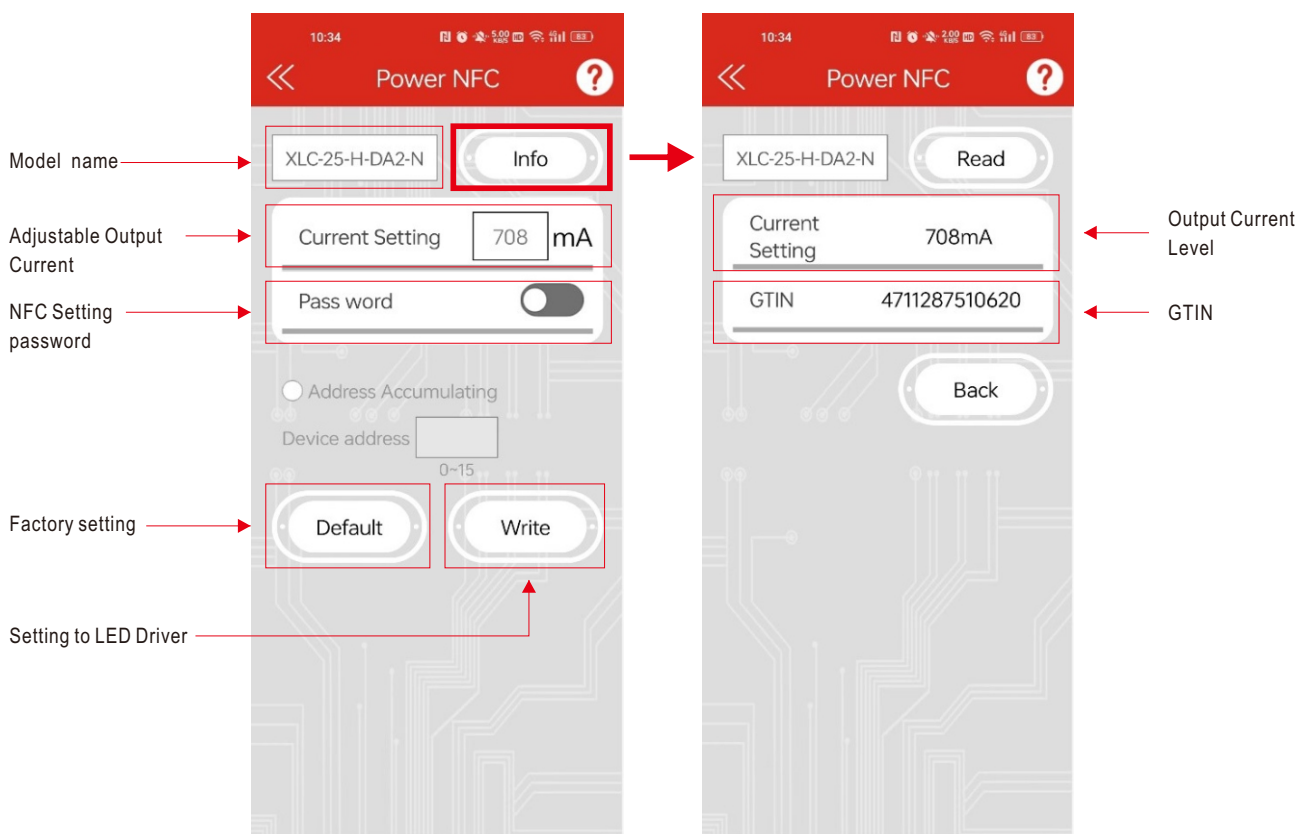

- To be used through APP available on Apple Store and Google Play Store for iOS and Android.
Search: MEAN WELL on



Note: 1. Current accuracy : the numerical error between the set current and the actual current is within 2%.
2. Please turn off the input power supply to the LED driver when using NFC function.



DIMMING OPERATION

◎ B type



※ 3 in 1 dimming function

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)



◎ Applying additive 0 ~ 10VDC

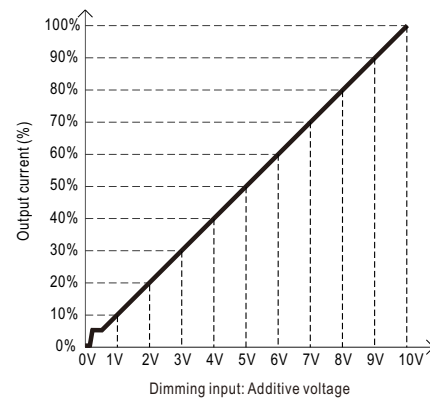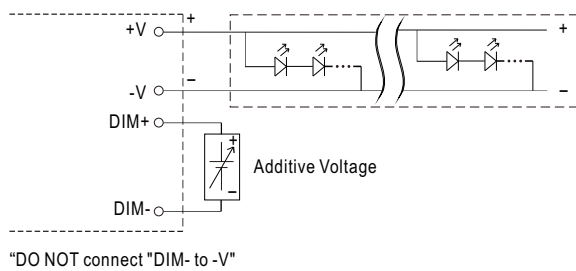

◎ Applying additive 10V PWM signal (frequency range 300Hz~3KHz):

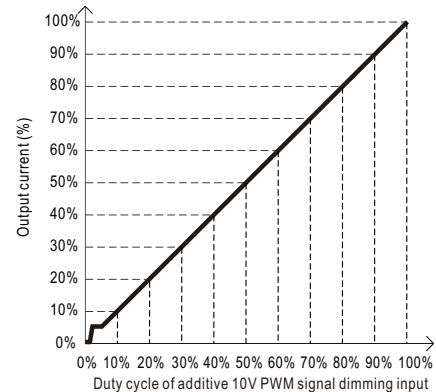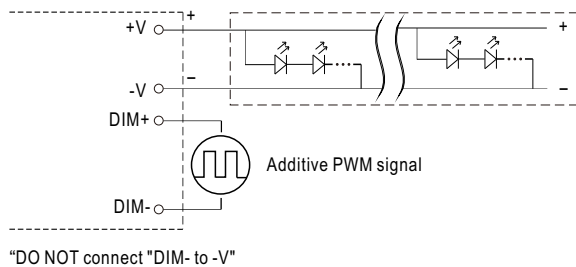

◎ Applying additive resistance: 0~100k Ω

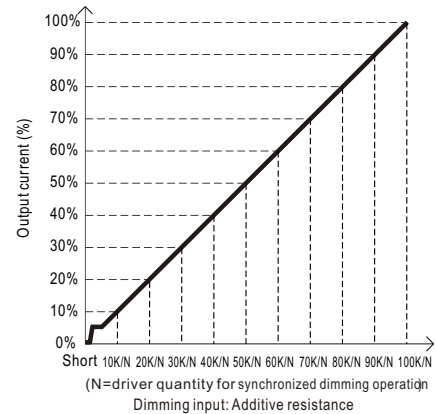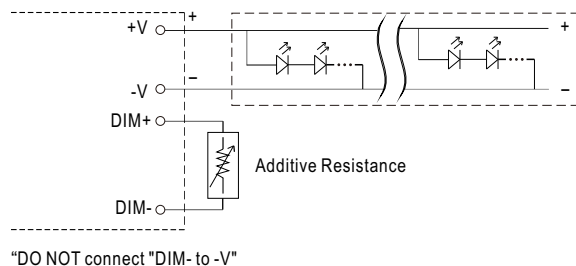


Note : 1. Min. dimming level is about 8% and the output current is not defined when $0\% < I_{out} < 8\%$.

2. The output current could drop down to 0% when dimming input is about 0k Ω or 0Vdc, or 10V PWM signal with 0% duty cycle.

DIMMING OPERATION

DA2 type (DALI-2 digital dimming function)

※ Input wiring diagram

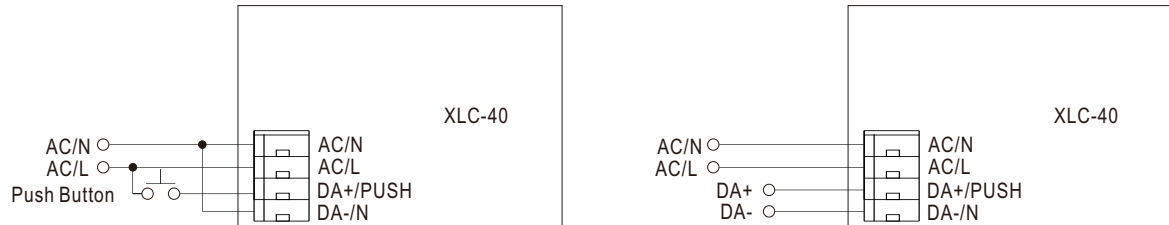


※ PUSH dimming (primary side)


- The factory default dimming level is at 100%.
- If the push action lasts less than 0.05 sec., it will not lead to a change for the status of the driver.
- Up to 10 drivers can perform the PUSH dimming at the same time when utilizing one common push button.
- The maximum length of the cable from the push button to the last driver is 20 meters.

| Action | Action duration | Function |
|--------------|---------------------|---|
| Short Push | 0.1~1s | Turn ON-OFF the driver |
| Double Click | Click twice in 1.5s | Set up the dimming level to 100% |
| Long Push | 1.5~10s | Every Long Push changes the dimming direction, dimming up or down |

■ OUTPUT LOAD vs TEMPERATURE

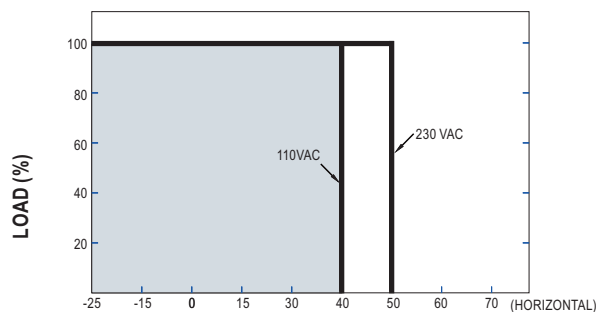


AMBIENT TEMPERATURE, Ta (°C)

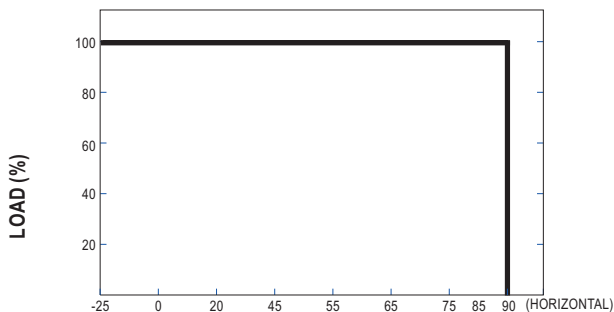

Tcase (°C)


■ STATIC CHARACTERISTIC

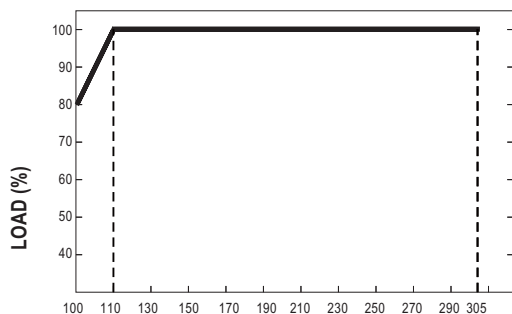

INPUT VOLTAGE (V) 60Hz



※ De-rating is needed under low input voltage.

■ LIFE TIME

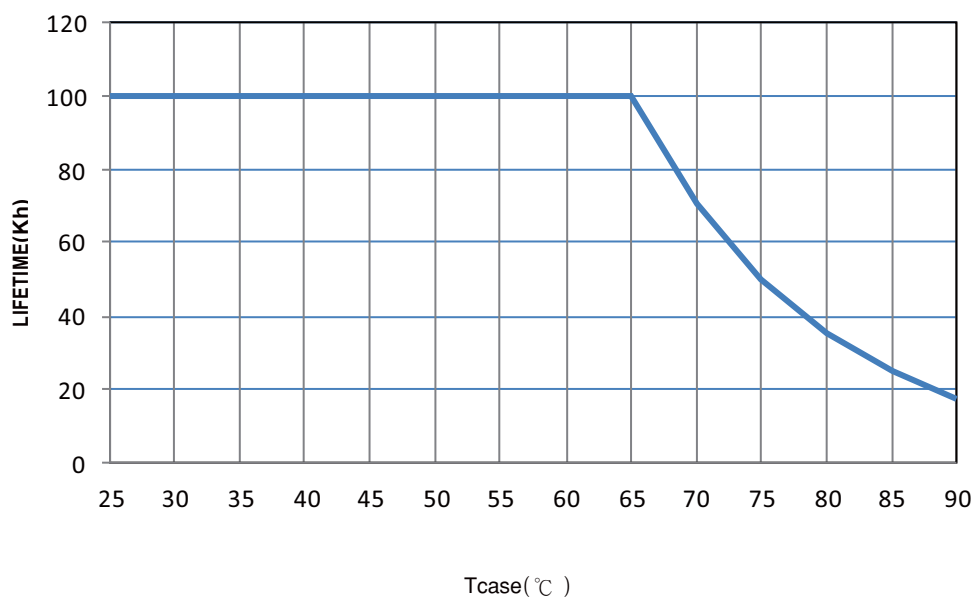



TOTAL HARMONIC DISTORTION (THD)

※ XLC-40-H Model, Tcase at 75°C

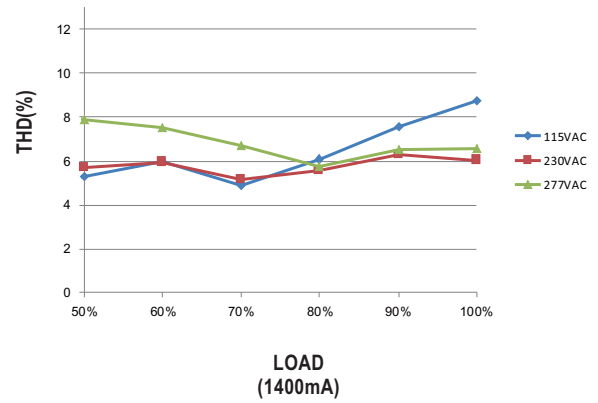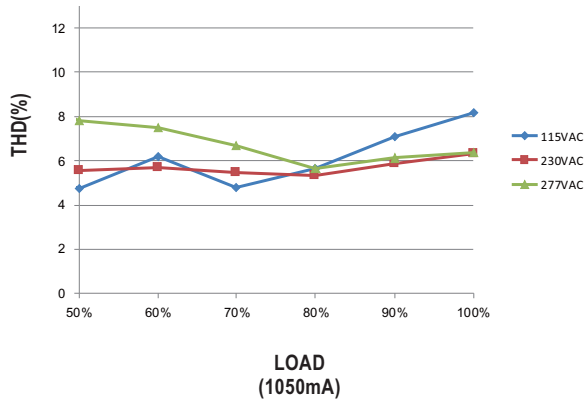

POWER FACTOR (PF) CHARACTERISTIC



※ XLC-40-H Model, Tcase at 75°C

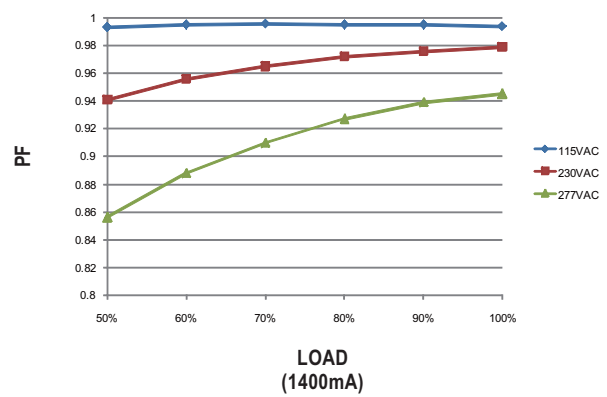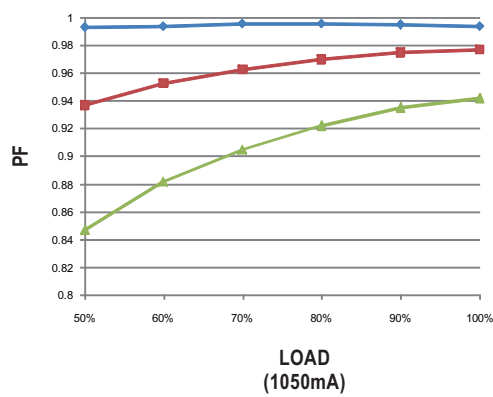

EFFICIENCY vs LOAD

XLC-40 series possess superior working efficiency that up to 88% can be reached in field applications.

※ XLC-40-H Model, Tcase at 75°C

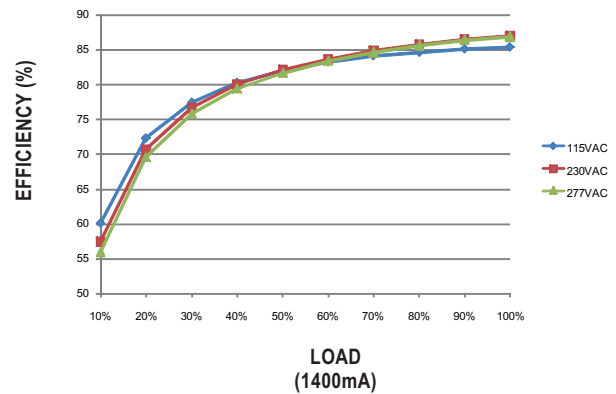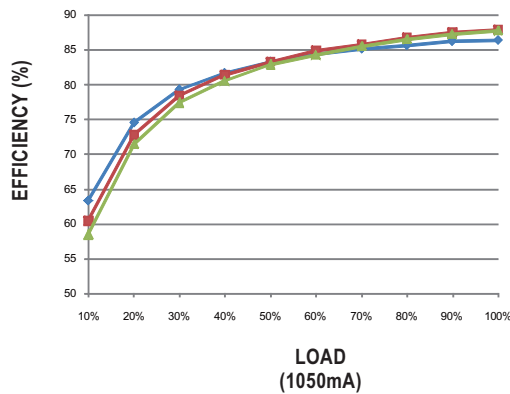


MECHANICAL SPECIFICATION
(XLC-40 Built-in Type)

Case No.XLC-25

Unit:mm

Tolerance:±1

※ Blank type

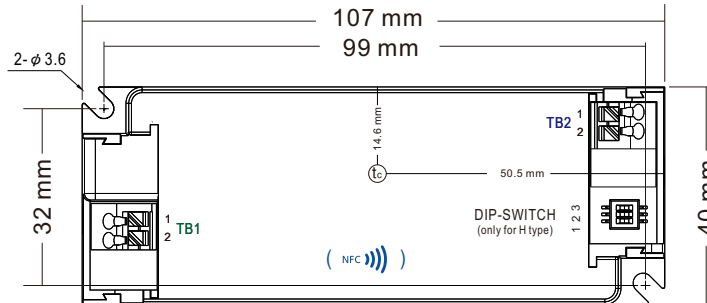


※ Terminal Pin No. Assignment(TB1)

| Pin No. | Assignment |
|---------|------------|
| 1 | AC/N |
| 2 | AC/L |

※ Terminal Pin No. Assignment(TB2)

| Pin No. | Assignment |
|---------|------------|
| 1 | +V |
| 2 | -V |

※ B type

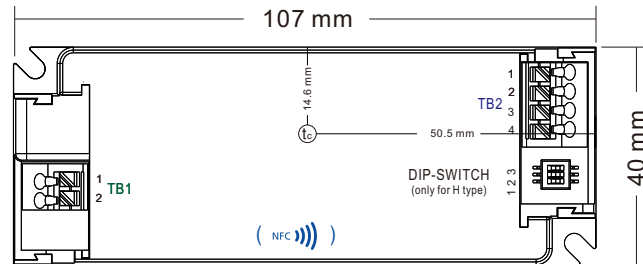

※ Terminal Pin No. Assignment(TB1)

| Pin No. | Assignment |
|---------|------------|
| 1 | AC/N |
| 2 | AC/L |


※ Terminal Pin No. Assignment(TB2)

| Pin No. | Assignment |
|---------|------------|
| 1 | +V |
| 2 | -V |
| 3 | DIM+ |
| 4 | DIM- |

※ DA2 type




※ Terminal Pin No. Assignment(TB1)

| Pin No. | Assignment |
|---------|------------|
| 1 | AC/N |
| 2 | AC/L |
| 3 | DA+/PUSH |
| 4 | DA-/N |

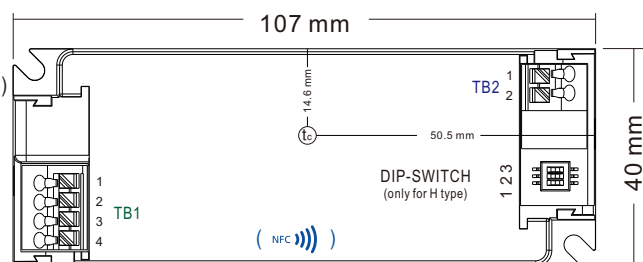

※ Terminal Pin No. Assignment(TB2)

| Pin No. | Assignment |
|---------|------------|
| 1 | +V |
| 2 | -V |

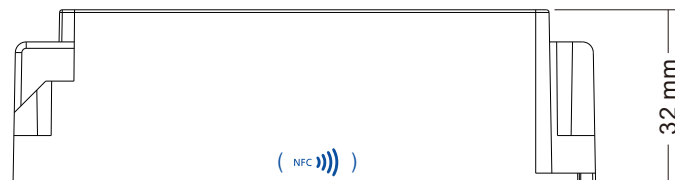TB1 wiring:

TB2 wiring:


| Item | Order No. | Quantity(MOQ/1Bag) |
|-------------------|-------------|--------------------|
| Strain-relief cap | 1**3XLC-SET | 50pcs (2pcs 1 set) |

Tolerance: ± 1

8-9mm

0.5-1.5mm

File Name: XLC-40-SPEC 2025-01-20