



Наличие и актуальные цены на

HSP-150-3.8

<https://www.mean-well.ru/store/HSP-150-3.8/>



■ Features :

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- High efficiency up to 90%
- Low leakage current<0.4mA
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection for 150W and 200W with 30CFM forced air
- Low profile:32mm
- Conformal coated
- ZVS technology to reduce power dissipation
- Built-in remote sense
- LED indicator for power on
- 3 years warranty




SPECIFICATION

MODEL		HSP-150-2.5		HSP-150-3.8		HSP-150-5	
OUTPUT	DC VOLTAGE	2.5V		3.8V		5V	
	RATED CURRENT	30A		30A		30A	
	CURRENT RANGE(convection)	0 ~ 30A		0 ~ 30A		0 ~ 30A	
	PEAK CURRENT RANGE(30CFM FAN)	0 ~ 40A		0 ~ 40A		0 ~ 40A	
	RATED POWER(convection)	75W		114W		150W	
	PEAK POWER(30CFM FAN)	100W		152W		200W	
	RIPPLE & NOISE (max.) Note.2	80mVp-p		100mVp-p		100mVp-p	
	VOLTAGE ADJ. RANGE	2.35~2.75V		3.4~4.2V		4.5~5.5V	
	VOLTAGE TOLERANCE Note.3	±2.0%		±2.0%		±2.0%	
	LINE REGULATION	±0.5%		±0.5%		±0.5%	
	LOAD REGULATION	±1.0%		±1.0%		±1.0%	
	SETUP, RISE TIME	2000ms, 100ms/230VAC 3000ms, 100ms/115VAC at full load					
HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC at full load						
INPUT	VOLTAGE RANGE Note.4	90 ~ 264VAC 127 ~ 370VDC					
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	PF ≥0.95/230VAC PF ≥0.98/115VAC at full load					
	EFFICIENCY (Typ.)	86%		88%		90%	
	AC CURRENT (Typ.)	0.8A/115VAC 0.4A/230VAC		1.2A/115VAC 0.6A/230VAC		1.5A/115VAC 0.8A/230VAC	
	INRUSH CURRENT (Typ.)	Cold start 70A/230VAC					
	LEAKAGE CURRENT	<0.4mA / 240VAC					
PROTECTION	OVERLOAD	140~180% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	SHORT CIRCUIT	Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	OVER VOLTAGE	3.2 ~ 3.7V		4.7 ~ 5.7V		5.7 ~ 7.0V	
		Protection type : Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE	110℃±5℃ (TSW1)				115℃±5℃ (TSW1)	
	Protection type : Hiccup mode, recovers automatically after fault condition is removed						
ENVIRONMENT	WORKING TEMP.	-30 ~ +70℃ (Refer to "Derating Curve")					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 60℃)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC (Note 5)	SAFETY STANDARDS	UL60950-1, EN60950-1, EAC TP TC 004 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3.0KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC/25℃ / 70%RH					
	EMC EMISSION	Compliance to EN55032 (CISPR32) Class B, EN61000-3-2, EN61000-3-3, EAC TP TC 020					
	EMC IMMUNITY	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; EN55024, light industry level (surge 4KV), criteria A, EAC TP TC 020					
OTHERS	MTBF	263.2K hrs min. MIL-HDBK-217F (25℃)					
	DIMENSION	220*62*32mm (L*W*H)					
	PACKING	0.61kg; 24pcs/15.6kg/1.63CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : line regulation and load regulation. 4. Derating may be needed under low input voltages. Please check the static characteristics for more details. 5. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx						

Mechanical Specification

CASE NO.:208A

Unit:mm

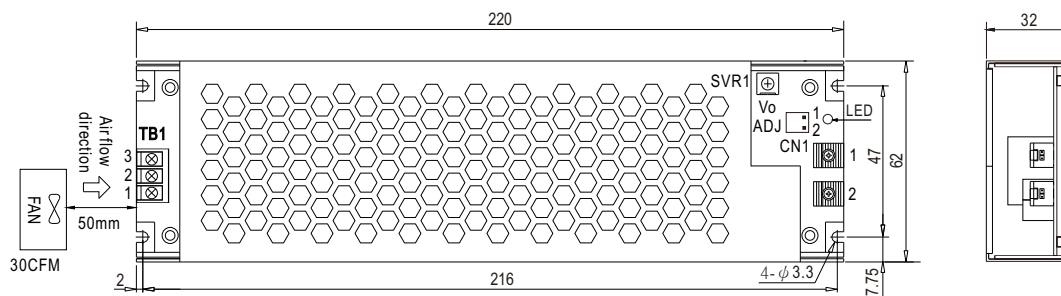

AC Input Terminal(TB1) pin NO. Assignment

Pin No.	Assignment	Terminal
1	AC/L	T21-BM10-03
2	AC/N	
3	FG $\perp$	


Remote sense pin(CN1):JS-1001-02 or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	-S	JS-2001-02 or equivalent	JS-1001-02 or equivalent
2	+S		


DC Output Terminal pin NO. Assignment

Pin No.	Assignment	Terminal
1	-V	CPB-7 M5
2	+V	

Block Diagram

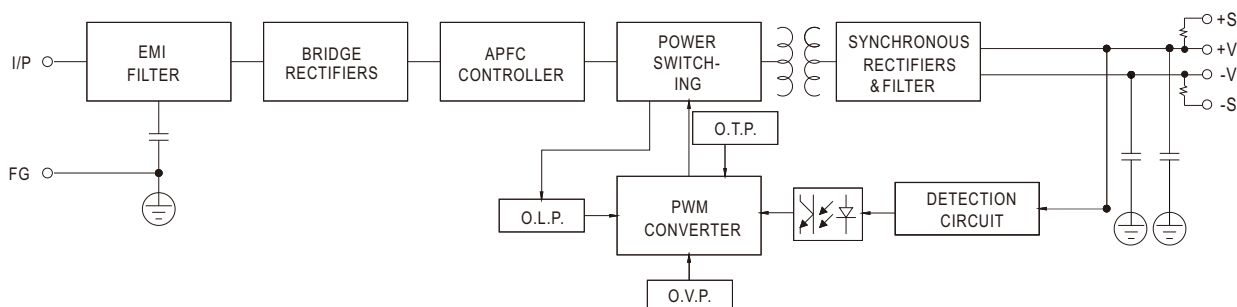

Derating Curve

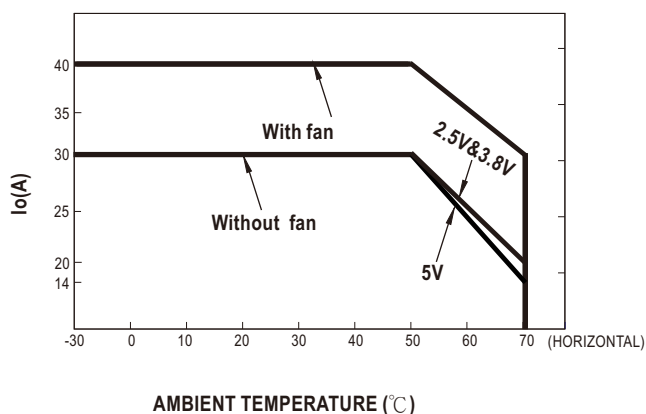

Static Characteristics

