



Наличие и актуальные цены на

LDD-1050H-WDA

<https://www.mean-well.ru/store/LDD-1050H-WDA/>



■ Features :

- DC/DC step-down converter
- Constant current output: 350mA to 1400mA
- Wide input voltage: 6 ~ 50VDC
Wide output LED string voltage: 3 ~ 45VDC
- High efficiency up to 95%
- Built-in EMI filter, comply with BS EN/EN55015 without additional input filter and capacitors
- Built-in PWM and remote ON/OFF control(pin style only, wire style optional)
- Protections: Short circuit
- Cooling by free air convection
- Fully encapsulated with IP65 level
- Compact size
- Suitable for driving illumination LED
- 3 years warranty

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>




LDD-350H-**W** DA Blank : pin style
W : wire style

SPECIFICATION

ORDER NO.		LDD-350H-□ DA	LDD-700H-□ DA	LDD-1050H-□ DA	LDD-1400H-□ DA	
OUTPUT	CURRENT RANGE	350mA	700mA	1050mA	1400mA	
	VOLTAGE RANGE Note.4	3 ~ 45VDC			3 ~ 36VDC	
	CURRENT ACCURACY (Typ.)	±5% at 48VDC input			±5% at 28VDC input	
	RIPPLE & NOISE(max.) Note.2	300mVp-p	500mVp-p	500mVp-p	500mVp-p	
	SWITCHING FREQUENCY (Typ.)	500KHz				
	EXTERNAL CAPACITANCE LOAD (max.)	1400uF				
INPUT	VOLTAGE RANGE	6 ~ 50VDC			6 ~ 40VDC	
	EFFICIENCY (max.)	95% at full load and 48VDC input				
	DC CURRENT	Full load Note.3	275mA	550mA	825mA	1280mA
		No load	5mA			
	FILTER	Capacitor				
PWM DIMMING & ON/OFF CONTROL (PIN STYLE ONLY)	REMOTE ON/OFF	Leave open if not use Power ON with dimming: DIM ~ -Vin >1.2 ~ 5VDC or open circuit, max. operation voltage 5.5VDC Power OFF : DIM ~ -Vin < 0.1VDC or short				
	PWM FREQUENCY	200Hz only				
	QUIESCENT INPUT CURRENT IN SHUTDOWN MODE(max.)	1mA at PWM dimming OFF and 24VDC input				
	SHORT CIRCUIT	Regulated at rated output current Protection type: Can be continued, recovers automatically after fault condition is removed				
	INPUT VOLTAGE LOCKOUT	Start up	4.2VDC			
	Shut-down	3.8VDC				
ENVIRONMENT	WORKING TEMP.	-40 ~ + 85℃ (Refer to derating curve)				
	WORKING HUMIDITY	20% ~ 90% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-55 ~ +125℃, 10 ~ 95% RH non-condensing				
	TEMP. COEFFICIENT	±0.03% / °C				
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes				
	OPERATING CASE TEMP. (max.)	100℃				
	SAFETY STANDARDS	EAC TP TC 020/2011 approved				
EMC	EMC EMISSION	Compliance to BS EN/EN55015, EAC TP TC 020				
	EMC IMMUNITY	Compliance to BS EN/EN61547, EN61000-4-2,3,4,6,8, light industry level, criteria A, EAC TP TC 020				
	MTBF	1000Khrs min. MIL-HDBK-217F (25℃)				
OTHERS	DIMENSION	40.6*23.5*10.1mm or 1.6**0.93**0.40" inch (L*W*H)				
	PACKING	LDD-H-DA: 18g ; 12pcs/per tube, 336pcs/28 tube/per carton LDD-H-WDA:23g ; 8pcs/Box, 240pcs/30 Box/per carton				
	POTTING MATERIAL	Expoxy(UL94-V0)				
	NOTE	1.All parameters are specified at normal input(48VDC), rated load, 25℃ 70% RH ambient. 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf capacitor. 3.Test condition: 48VDC input for 350~1050mA, 28VDC input for 1400mA. 4.Output voltage will always step down by 3 volts from input DC voltage. 5.The output of LDD-H should not be connected to the input of the same unit or output from other sources. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx				


■ Mechanical Specification

◎ Pin style(LDD- 350H~1400H - DA):

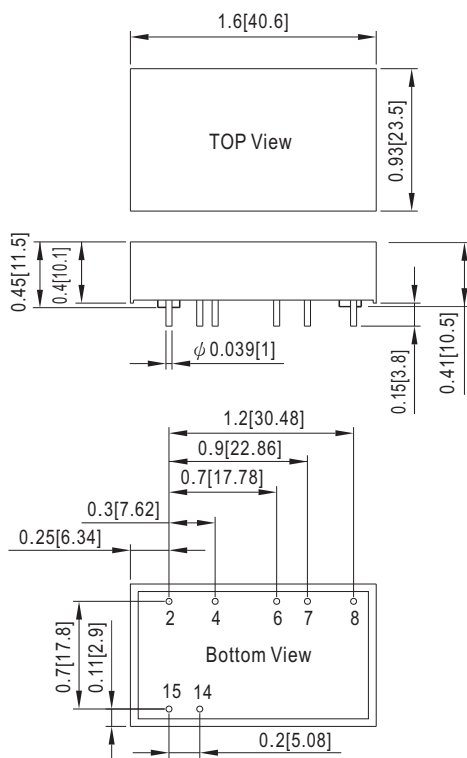

NOTE: Pin tolerance $\pm 0.05\text{mm}$

◎Wire style(LDD - 350H~1400H-WDA):

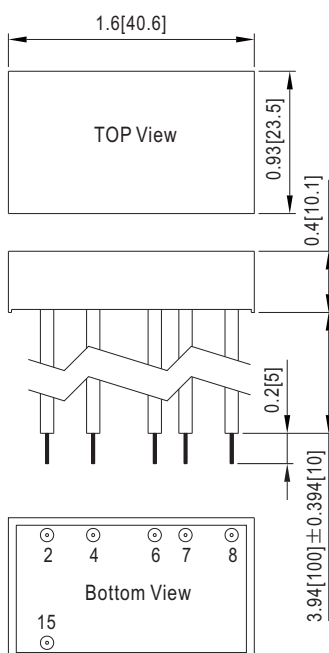


NOTE: Wire is 24AWG

■ Pin Configuration



Pin No.		Comment
2	+Vin	DC supply
4	+Vout	LED+ connection
6	-Vout	LED- connection
7	DA	Connect to DALI Controller
8	DA	
14	PWM DIM	PWM Dimming
15	-Vin	DC supply, Don't connect to -Vout

Pin No.		Comment
2	+Vin (Red)	DC supply
4	+Vout (Yellow)	LED+ connection
6	-Vout (Blue)	LED- connection
7	DA (Brown)	Connect to DALI Controller
8	DA (Brown)	
15	-Vin (Black)	DC supply, Don't connect to -Vout

■ PWM Dimming Control & Diagram(pin style only, wire style optional)

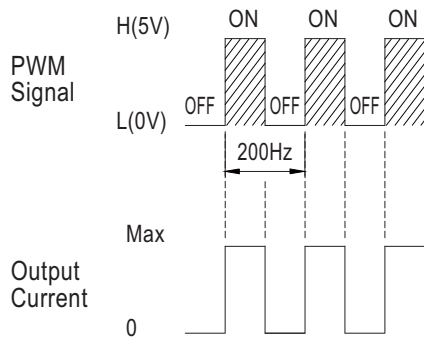

⊙ During PWM dimming operation, the output current will change to PWM style.

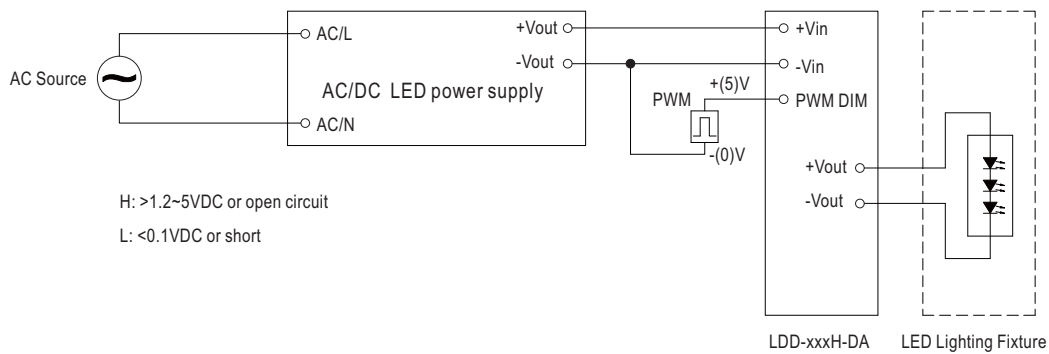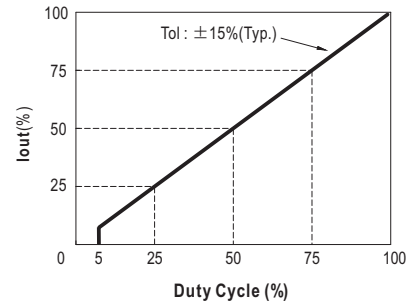

■ Efficiency VS Output Voltage(Number of LEDs)

Fig-1 12VDC input, 1~3 LEDs(Vf=3V)

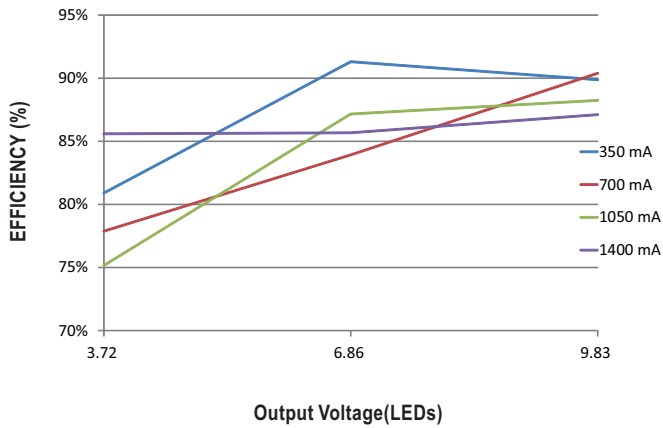


Fig-2 24VDC input, 1~7 LEDs(Vf=3V)

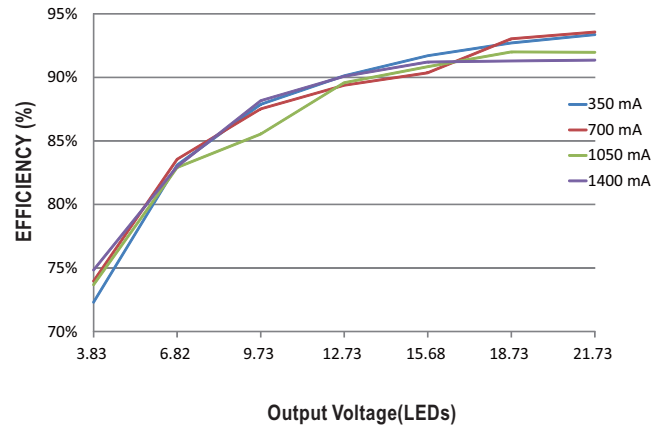


Fig-3 36VDC input, 1~11 LEDs(Vf=3V)



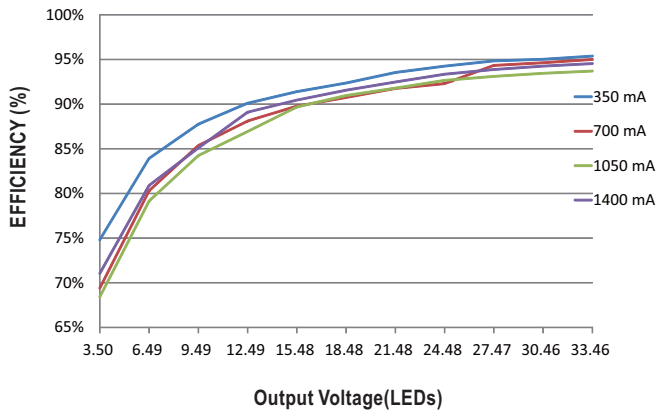




Fig-4 48VDC input, 1~15 LEDs(Vf=3V)

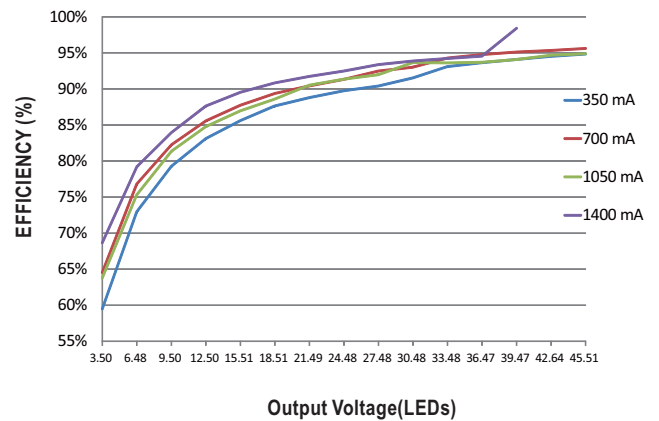


■ Derating Curve

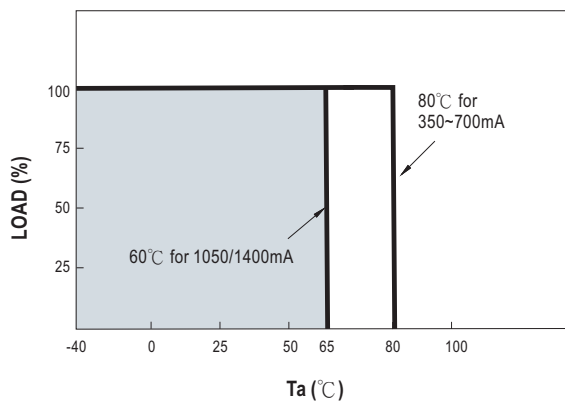

Packing

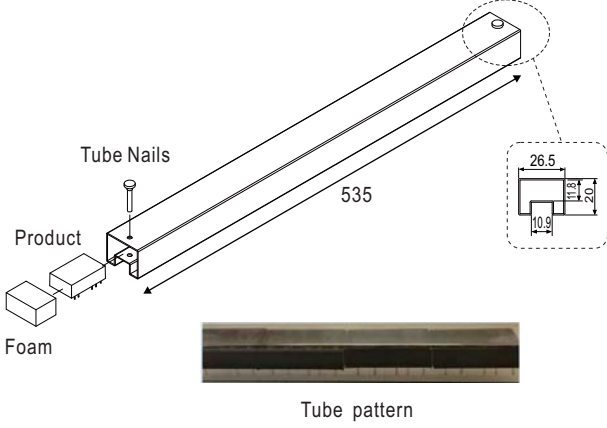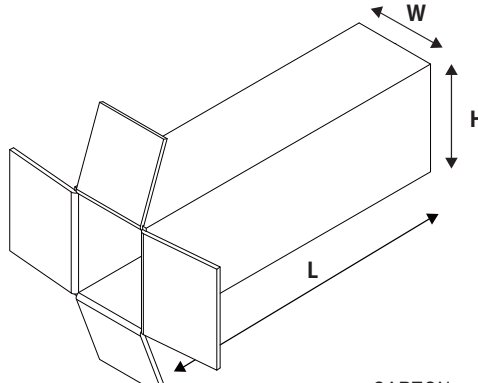Standard Tube Packing	LDD-H-DA			
	MPQ Per Tube (PCS)	One Tube G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm  Tube Nails Product Foam 535 26.5 10.9 Tube pattern  CARTON L590.9 x W148.5 x H193.9	12	308g	336	10.63Kg

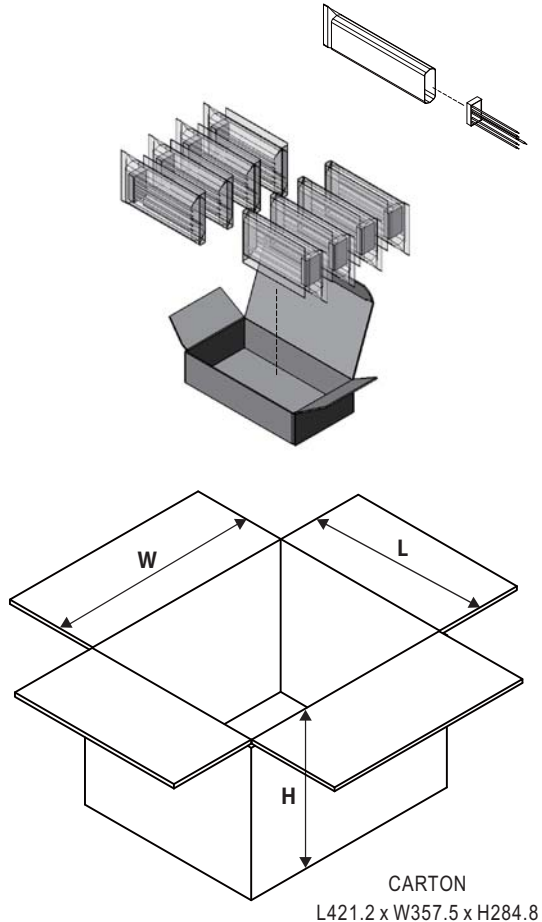Standard Packing	LDD-H-WDA			
	MPQ Per Box (PCS)	One Box G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm  CARTON L421.2 x W357.5 x H284.8	8	205g	240	8.15Kg

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>