



Наличие и актуальные цены на



MDS01N-15

<https://www.mean-well.ru/store/MDS01N-15/>



1W SIP Package DC-DC Medical Grade Unregulated Converter

MDS01 & MDD01 series



■ Features

- SIP7 package with international standard pinout
- Operating temperature range $-40 \sim +85^{\circ}\text{C}$
- Medical safety approved (1xMOPP/2xMOOP) according to ANSI/AAMI ES60601-1
- Low patient leakage current $<2\mu\text{A}$
- Protection: Short circuit(3 second max.)
- 6KVDC or 4.2KVAC high I/O isolation (Reinforced isolation)
- Low cost
- 3 years warranty

■ Applications

- Medical devices
- Medical oxygen monitor
- CT scanning
- Medical carts
- Oral care equipment

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

MDS01 and MDD01 series are 1W isolated and unregulated module type medical grade DC-DC converter with SIP7 package. It features international standard pins, a high efficiency up to 83%, wide working temperature range $-40 \sim +85^{\circ}\text{C}$, 6KVDC or 4.2KVAC I/P-O/P high isolation voltage, short circuit protection, etc. The models account for different input voltage 5V/12V/24V $\pm 10\%$, and various output voltage, 3.3V/5V/12V/15V for single output and $\pm 5\text{V}/\pm 9\text{V}/\pm 12\text{V}/\pm 15\text{V}$ for dual outputs, which are suitable for medical systems, ultra low leakage current.

■ Model Encoding

MD **S** 01 **L** - **12**

Output voltage (3.3/5/12/15Vdc , $\pm 5/\pm 9/\pm 12/\pm 15\text{Vdc}$)

Input voltage (L: 4.5 ~ 5.5Vdc , M: 10.8 ~ 13.2Vdc , N: 21.6 ~ 26.4Vdc)

Rated wattage

Series name { S:Single output
D:Dual output



1W SIP Package DC-DC Medical Grade Unregulated Converter

MDS01 & MDD01 series

MODEL SELECTION TABLE							
ORDER NO.	INPUT			OUTPUT		EFFICIENCY (TYP.)	CAPACITOR LOAD (MAX.)
	INPUT VOLTAGE (RANGE)	INPUT CURRENT		OUTPUT VOLTAGE	OUTPUT CURRENT		
		NO LOAD	FULL LOAD				
MDS01L-03	Normal 5V (4.5 ~ 5.5V)	25mA	260mA	3.3V	31 ~ 303mA	73%	1000μF
MDS01L-05		25mA	260mA	5V	20 ~ 200mA	78%	1000μF
MDS01L-12		40mA	260mA	12V	9 ~ 84mA	77%	470μF
MDS01L-15		45mA	265mA	15V	7 ~ 67mA	75%	470μF
MDD01L-05		25mA	260mA	±5V	±10 ~ 100mA	79%	*470μF
MDD01L-09		35mA	260mA	±9V	±6 ~ 56mA	81%	*470μF
MDD01L-12		40mA	265mA	±12V	±5 ~ 42mA	77%	*220μF
MDD01L-15		45mA	275mA	±15V	±4 ~ 34mA	77%	*220μF
MDS01M-05	Normal 12V (10.8 ~ 13.2V)	15mA	105mA	5V	20 ~ 200mA	78%	1000μF
MDS01M-12		15mA	105mA	12V	9 ~ 84mA	82%	470μF
MDS01M-15		15mA	105mA	15V	7 ~ 67mA	83%	470μF
MDD01M-05		14mA	105mA	±5V	±10 ~ 100mA	78%	*470μF
MDD01M-09		14mA	105mA	±9V	±6 ~ 56mA	82%	*470μF
MDD01M-12		22mA	114mA	±12V	±5 ~ 42mA	75%	*220μF
MDD01M-15		22mA	114mA	±15V	±4 ~ 34mA	76%	*220μF
MDS01N-05	Normal 24V (21.6 ~ 26.4V)	9mA	55mA	5V	20 ~ 200mA	77%	1000μF
MDS01N-12		9mA	55mA	12V	9 ~ 84mA	79%	470μF
MDS01N-15		9mA	55mA	15V	7 ~ 67mA	79%	470μF
MDD01N-05		9mA	55mA	±5V	±10 ~ 100mA	77%	*470μF
MDD01N-09		9mA	55mA	±9V	±6 ~ 56mA	79%	*470μF
MDD01N-12		10mA	56mA	±12V	±5 ~ 42mA	77%	*220μF
MDD01N-15		11mA	57mA	±15V	±4 ~ 34mA	77%	*220μF


* For each output



SPECIFICATION				
INPUT	VOLTAGE RANGE		L: 4.5 ~ 5.5Vdc M: 10.8 ~ 13.2Vdc N: 21.6 ~ 26.4Vdc	
	SURGE VOLTAGE (100ms max.)		5Vin models : 9Vdc 12Vin models : 18Vdc 24Vin models : 30Vdc	
	FILTER		Internal capacitor	
	PROTECTION		Fuse recommended. 500mA Slow-Blow Type for all models	
OUTPUT	VOLTAGE ACCURACY		±5.0%	
	RATED POWER		1W	
	RIPPLE & NOISE	Note.2	75mVp-p	
	LINE REGULATION	Note.3	1.2% for 1% input variation	
	LOAD REGULATION	Note.4	±10%	
	SWITCHING FREQUENCY (Typ.)		100KHz	
PROTECTION	SHORT CIRCUIT		3 second max.	
ENVIRONMENT	COOLING		Free-air convection	
	WORKING TEMP.		-40 ~ +85°C (Refer to "Derating Curve")	
	WORKING HUMIDITY		20% ~ 90% RH non-condensing	
	STORAGE TEMP., HUMIDITY		-55 ~ +125°C, 10 ~ 95% RH non-condensing	
	TEMP. COEFFICIENT		0.02% / °C (0 ~ 85°C)	
	SOLDERING TEMPERATURE		1.5mm from case of 1 ~ 3sec./260°C max.	
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes	
SAFETY & EMC (Note.6)	SAFETY STANDARDS		UL60601-1, EAC TP TC 020/2011 approved	
	WITHSTAND VOLTAGE		I/P-O/P:6KVDC or 4.2KVAC	
	ISOLATION RESISTANCE		I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH	
	ISOLATION LEVEL		Primary-secondary: 1xMOPP / 2xMOOP when system input voltage is with 250VAC, 50/60Hz	
	ISOLATION CAPACITANCE (Typ.)		5pF	
	EMC EMISSION	Parameter	Standard	Test Level / Note
		Conducted	BS EN/EN55011(CISPR11)	Class B
		Radiated	BS EN/EN55011(CISPR11)	Class B
	EMC IMMUNITY	Parameter	Standard	Test Level / Note
ESD		BS EN/EN61000-4-2	Level 2, ±8KV contact	
OTHERS	MTBF		3500Khrs MIL-HDBK-217F(25°C)	
	DIMENSION (L*W*H)		19.5*9.8*12.5mm (0.77*0.386*0.492 inch)	
	CASE MATERIAL		Non-Conductive black plastic (UL 94V-0 rated)	
	PACKING		4.2g ; 25pcs/per tube, 3000pcs/120 tube/per carton	
NOTE	1.All parameters are specified at normal input(L:5Vdc, M:12Vdc, N:24Vdc), rated load, 25°C 70% RH ambient. 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1µf & 47µf capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 10% to 100% rated load. 5.Patient leakage current(2µA max.) and reinforced isolation is based on a 250VAC, 50/60Hz system input voltage. 6.The final equipment must be re-confirm that it still meet EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."(as available on http://www.meanwell.com) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx			

■ Mechanical Specification

- All dimensions in mm(inch)
- Tolerance: $x.x \pm 0.25\text{mm}$ ($x.xx \pm 0.01"$)
 $x.xx \pm 0.10\text{mm}$ ($x.xxx \pm 0.004"$)
- Pin pitch tolerance: $\pm 0.05\text{mm}$ ($\pm 0.002"$)

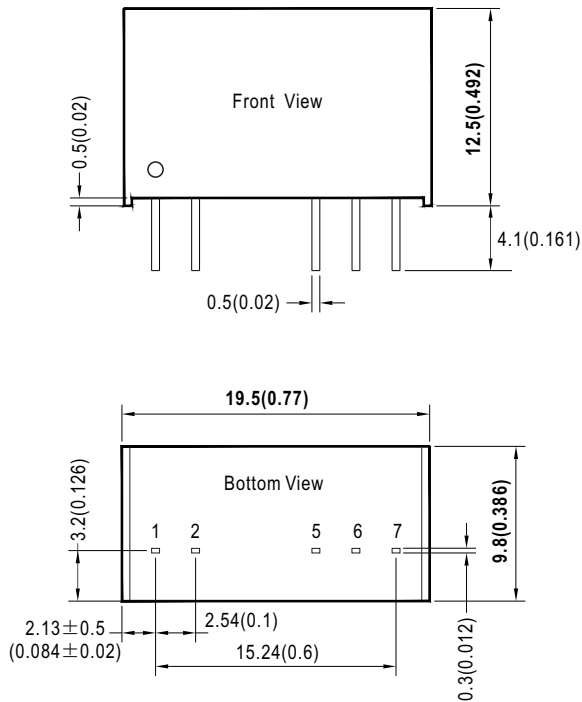


■ Plug Assignment

Pin-Out		
Pin No.	MDS01 (Single output)	MDD01 (Dual output)
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	No pin	Common
7	+Vout	+Vout

■ EMC Suggestion

EMC typical recommended circuit (Class B)

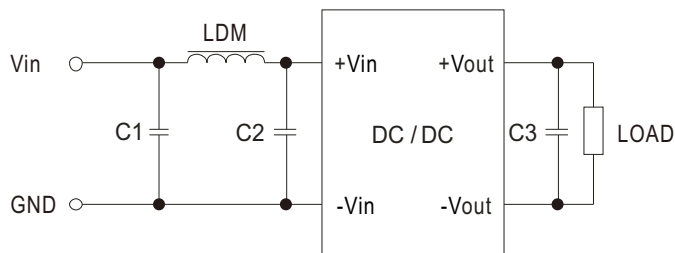

Recommended typical circuit parameters:


Input voltage (V)		3.3/5/12/15/24
EMI	C1,C2	4.7μF/50V
	C3	See table 2
	LDM	6.8μH

Table 1



Single Vout	C3(μF)	Dual Vout	C3(μF)
3.3/5V	10μF	±5V	4.7μF
12V	2.2μF	±9V	2.2μF
15V	1μF	±12V/15V	1μF

Table 2

Derating Curve

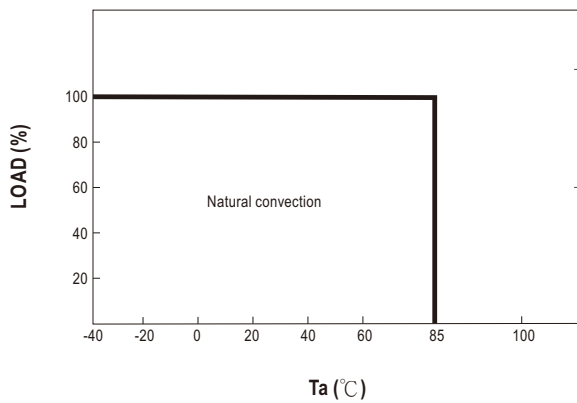

Packing

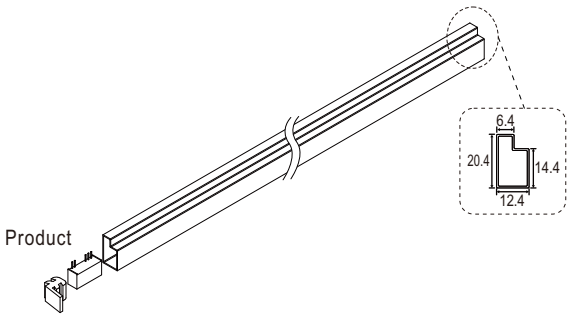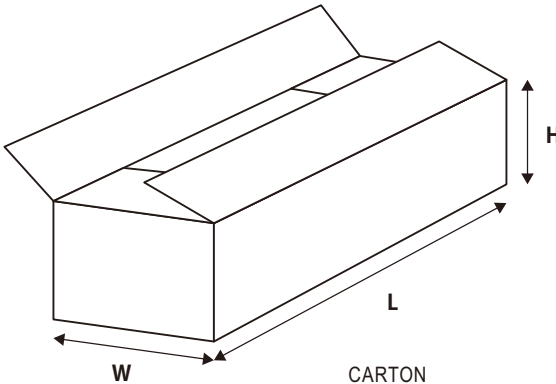Standard Tube Packing	MPQ Per Tube (PCS)	One Tube G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm  Product Tube Plugs  Tube pattern  CARTON L600 x W285 x H225	25	136g	3000	18.5Kg

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>