



Наличие и актуальные цены на

**NFM-05-15**

<https://www.mean-well.ru/store/NFM-05-15/>



#### ■ Features :

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Ultra-miniature size, light weight
- Cooling by free air convection
- Isolation class II
- Medical safety approved (2 x MOPP between primary to secondary)
- No load power consumption<0.5W
- 100% full load burn-in test
- Fixed switching frequency at 67KHz
- High reliability
- Suitable for BF application with appropriate system consideration
- 3 years warranty




#### SPECIFICATION

| MODEL                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | NFM-05-3.3                                                                                                                                       | NFM-05-5     | NFM-05-12    | NFM-05-15      | NFM-05-24    |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|----------------|--------------|
| OUTPUT                | DC VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 3.3V                                                                                                                                             | 5V           | 12V          | 15V            | 24V          |
|                       | RATED CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1.25A                                                                                                                                            | 1A           | 0.42A        | 0.33A          | 0.23A        |
|                       | CURRENT RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 0 ~ 1.25A                                                                                                                                        | 0 ~ 1A       | 0 ~ 0.42A    | 0 ~ 0.33A      | 0 ~ 0.23A    |
|                       | RATED POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 4.125W                                                                                                                                           | 5W           | 5.04W        | 4.95W          | 5.52W        |
|                       | RIPPLE & NOISE (max.) Note.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 80mVp-p                                                                                                                                          | 80mVp-p      | 150mVp-p     | 150mVp-p       | 240mVp-p     |
|                       | VOLTAGE ADJ. RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3 ~ 3.63V                                                                                                                                        | 4.5 ~ 5.5V   | 10.8 ~ 13.2V | 13.5 ~ 16.5V   | 21.6 ~ 26.4V |
|                       | VOLTAGE TOLERANCE Note.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ±2.0%                                                                                                                                            | ±2.0%        | ±1.0%        | ±1.0%          | ±1.0%        |
|                       | LINE REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ±1.0%                                                                                                                                            | ±1.0%        | ±0.5%        | ±0.5%          | ±0.5%        |
|                       | LOAD REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ±1.0%                                                                                                                                            | ±1.0%        | ±0.5%        | ±0.5%          | ±0.5%        |
|                       | SETUP, RISE TIME                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1000ms, 20ms/230VAC 1000ms, 20ms/115VAC at full load                                                                                             |              |              |                |              |
| HOLD UP TIME (Typ.)   | 100ms/230VAC 24ms/115VAC at full load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                  |              |              |                |              |
| INPUT                 | VOLTAGE RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 85 ~ 264VAC 120 ~ 370VDC                                                                                                                         |              |              |                |              |
|                       | FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 47 ~ 440Hz                                                                                                                                       |              |              |                |              |
|                       | EFFICIENCY (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 67%                                                                                                                                              | 71%          | 73%          | 74%            | 76%          |
|                       | AC CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 0.12A/115VAC 0.08A/230VAC                                                                                                                        |              |              |                |              |
|                       | INRUSH CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | COLD START 25A/115VAC 45A/230VAC                                                                                                                 |              |              |                |              |
|                       | LEAKAGE CURRENT Note.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Touch current < 80μA/264VAC                                                                                                                      |              |              |                |              |
| PROTECTION            | OVERLOAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Above 105% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed                          |              |              |                |              |
|                       | OVER VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 3.8 ~ 4.95V                                                                                                                                      | 5.75 ~ 6.75V | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 27.6 ~ 32.4V |
|                       | OVER TEMPERATURE Note.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Tj 145°C typically (U1) detect on main control IC<br>Protection type : Shut down o/p voltage, recovers automatically after temperature goes down |              |              |                |              |
| ENVIRONMENT           | WORKING TEMP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -20 ~ +70°C (Refer to "Derating Curve")                                                                                                          |              |              |                |              |
|                       | WORKING HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 20 ~ 90% RH non-condensing                                                                                                                       |              |              |                |              |
|                       | STORAGE TEMP., HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -40 ~ +85°C, 10 ~ 95% RH                                                                                                                         |              |              |                |              |
|                       | TEMP. COEFFICIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ±0.03%/°C (0 ~ 50°C)                                                                                                                             |              |              |                |              |
|                       | VIBRATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes                                                                          |              |              |                |              |
| SAFETY & EMC (Note 4) | SAFETY STANDARDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ANSI/AAMI ES60601-1, TUV EN60601-1, IEC60601-1, EAC TP TC 004 approved                                                                           |              |              |                |              |
|                       | ISOLATION LEVEL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Primary-Secondary: 2xMOPP                                                                                                                        |              |              |                |              |
|                       | WITHSTAND VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | I/P-O/P:4KVAC                                                                                                                                    |              |              |                |              |
|                       | ISOLATION RESISTANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH                                                                                                       |              |              |                |              |
|                       | EMC EMISSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Compliance to EN55011(CISPR11), EN55032 (CISPR32) Class B, EN61000-3-2,-3, EAC TP TC 020                                                         |              |              |                |              |
| OTHERS                | EMC IMMUNITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN60601-1-2, EN61204-3, medical level, criteria A, EAC TP TC 020                                |              |              |                |              |
|                       | MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 738.7Khrs min. MIL-HDBK-217F (25°C)                                                                                                              |              |              |                |              |
|                       | DIMENSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 58*45*19.1mm (L*W*H)                                                                                                                             |              |              |                |              |
|                       | PACKING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0.03Kg; 120pcs/5.0Kg/0.97CUFT                                                                                                                    |              |              |                |              |
| NOTE                  | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.<br>5. The over temperature protection (OTP) is the built-in function of the control IC (U1). The activating level described above is based on the specification provided by the IC manufacturer.<br>6. Touch current was measured from primary input to DC output.<br>7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). |                                                                                                                                                  |              |              |                |              |


## Mechanical Specification

Unit: inch(mm)

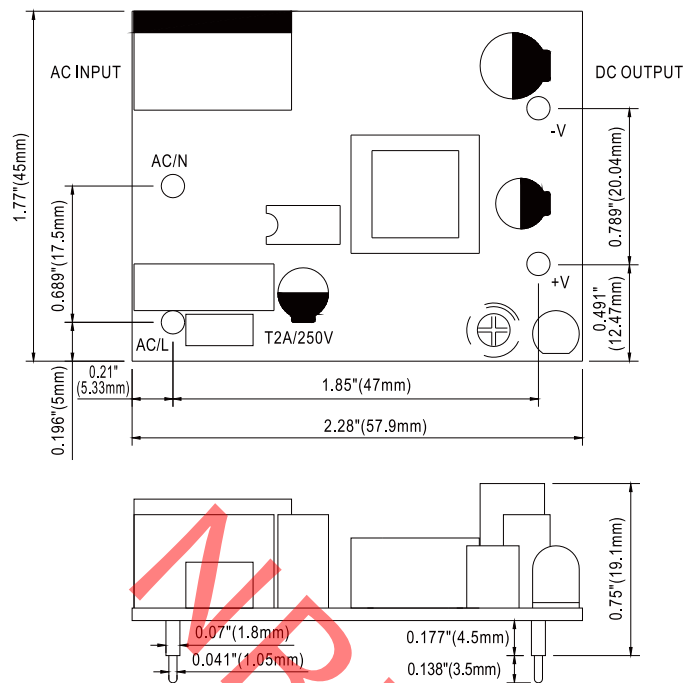

## Block Diagram

fosc : 67KHz

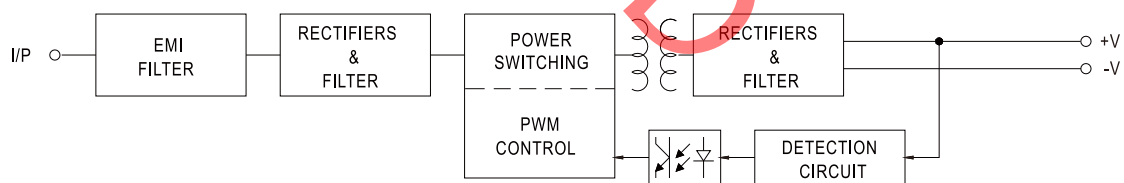

## Derating Curve

## Output Derating VS Input Voltage

