



Наличие и актуальные цены на

SD-25B-12

<https://www.mean-well.ru/store/SD-25B-12/>



- Features :
- 2:1 wide input range
- Protections: Short circuit / Overload / Over voltage
- 1500VAC I/O isolation
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Fixed switching frequency at 83KHz
- Low cost
- High reliability
- 2 years warranty

User's Manual



GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


AS/NZS62368-1 TPTC004


SPECIFICATION

MODEL	SD-25A-5	SD-25B-5	SD-25C-5	SD-25A-12	SD-25B-12	SD-25C-12	SD-25A-24	SD-25B-24	SD-25C-24						
OUTPUT	DC VOLTAGE	5V			12V			24V							
	RATED CURRENT	5A			2.1A			1.1A							
	CURRENT RANGE	0 ~ 5A			0 ~ 2.1A			0 ~ 1.1A							
	RATED POWER	25W			25.2W			26.4W							
	RIPPLE & NOISE (max.) Note.2	100mVp-p			120mVp-p			150mVp-p							
	VOLTAGE ADJ. RANGE	4.5 ~ 5.5VDC			11 ~ 16VDC			23 ~ 30VDC							
	VOLTAGE TOLERANCE Note.3	±2.0%			±1.0%			±1.0%							
	LINE REGULATION	±0.5%			±0.3%			±0.2%							
	LOAD REGULATION	±0.5%			±0.3%			±0.2%							
	SETUP, RISE, HOLD UP TIME	2.5s, 50ms, ----- at full load													
INPUT	VOLTAGE RANGE	A: 9.2 ~ 18VDC		B: 19 ~ 36VDC		C: 36 ~ 72VDC									
	EFFICIENCY (Typ.)	71%	72%	74%	72%	75%	78%	75%	78%						
	DC CURRENT	3.2A/12V	1.6A/24V	0.8A/48V	3.2A/12V	1.6A/24V	0.8A/48V	3.2A/12V	1.6A/24V						
PROTECTION	OVERLOAD	105 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed													
	OVER VOLTAGE	5.75 ~ 6.75V/10% load		16.8 ~ 20V/10% load		31.5 ~ 37.5V/10% load									
		Protection type : Hiccup mode, recovers automatically after fault condition is removed													
ENVIRONMENT	WORKING TEMP.	-10 ~ +60°C (Refer to "Derating Curve")													
	WORKING HUMIDITY	20 ~ 90% RH non-condensing													
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH													
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)													
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes													
SAFETY & EMC (Note 4)	SAFETY STANDARDS	EAC TP TC 004 approved, Design refer to LVD, AS/NZS 62368.1													
	WITHSTAND VOLTAGE	I/P-O/P: 1.5KVAC I/P-FG: 2KVAC O/P-FG: 0.5KVAC													
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms / 500VDC / 25°C / 70% RH													
	EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class B, EAC TP TC 020													
OTHERS	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2, 3, 4, 6, 8, BS EN/EN55035, heavy industry level, EAC TP TC 020													
	MTBF	3682.6K hrs min. Telcordia SR-332 (Bellcore) ; 528.8K hrs min. MIL-HDBK-217F (25°C)													
	DIMENSION	99*97*36mm (L*W*H)													
	PACKING	0.38Kg; 45pcs/17.8Kg/0.94CUFT													
NOTE	1. All parameters NOT specially mentioned are measured at 12,24,48VDC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μF & 47 μF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx														

Mechanical Specification

(Unit: mm , tolerance ± 1 mm)


Case No. 905

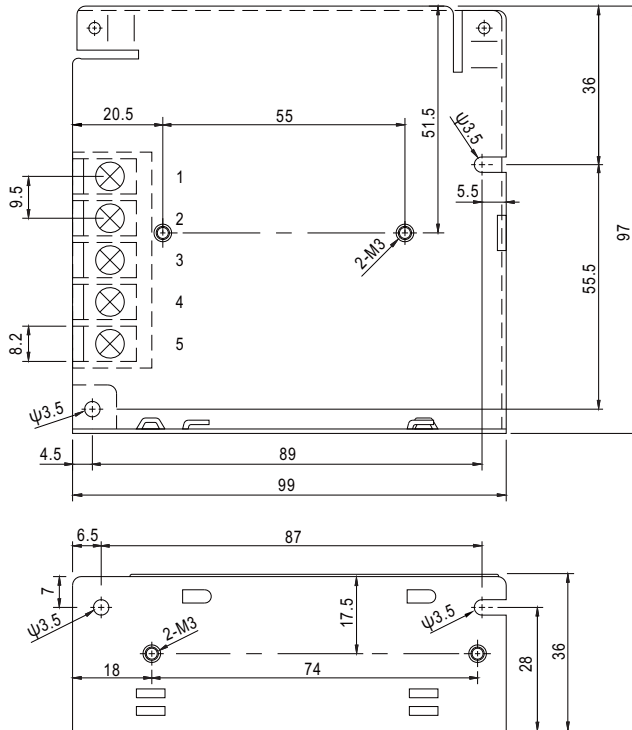


Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	DC INPUT V-	4	DC OUTPUT +V
2	DC INPUT V+	5	DC OUTPUT -V
3	FG $\pm$		

Block Diagram

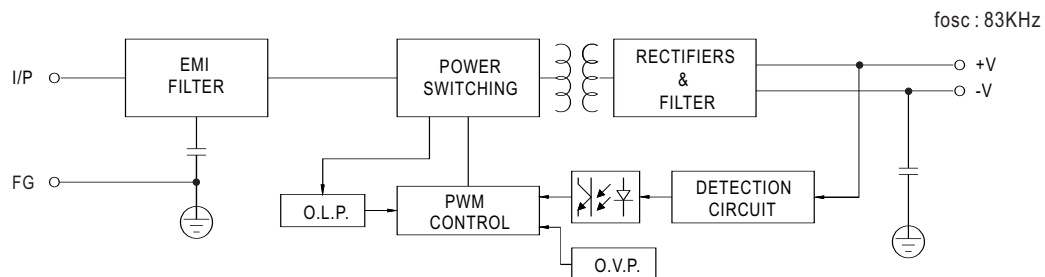

Derating Curve

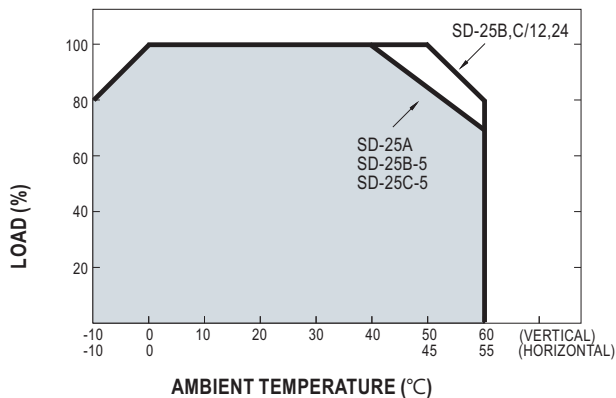

Static Characteristics(SD-25C-24V)

