



Наличие и актуальные цены на

SKA15C-05

<https://www.mean-well.ru/store/SKA15C-05/>



■ Features :

- 2:1 wide input range
- 4:1 wide input range(option)
- 1500VDC I/O isolation
- 3000VDC I/O isolation(option)
- Built-in EMI filter
- Protections: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% burn-in test
- Low cost / High reliability
- Approvals: FCC / EAC / CE / UKCA
- 2 years warranty

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


SPECIFICATION



ORDER NO.		SKA15A-033	SKA15B-033	SKA15C-033	SKA15A-05	SKA15B-05	SKA15C-05	SKA15A-12	SKA15B-12	SKA15C-12	SKA15A-15	SKA15B-15	SKA15C-15
OUTPUT	DC VOLTAGE	3.3V			5V			12V			15V		
	CURRENT RANGE	300 ~ 3000mA			300 ~ 3000mA			125 ~ 1250mA			100 ~ 1000mA		
	RATED POWER	9.9W			15W								
	RIPPLE & NOISE (max.) Note.2	50mVp-p			50mVp-p			60mVp-p			60mVp-p		
	LINE REGULATION Note.3	±0.2%											
	LOAD REGULATION Note.4	±0.5%											
	VOLTAGE ACCURACY	±2.0%											
	SWITCHING FREQUENCY	150KHz min.											
EXTERNAL CAPACITANCE LOAD (max.)	2700uF	2700uF	1000uF	2700uF	2700uF	1000uF	1800uF	1800uF	680uF	1500uF	1500uF	560uF	
INPUT	VOLTAGE RANGE	A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC											
	EFFICIENCY (Typ.)	76%	76%	76%	78%	78%	80%	82%	80%	82%	82%	80%	82%
	DC CURRENT	Full load	A: 1700mA B: 800mA C: 400mA										
		No load	A: 20mA B: 30mA C: 15mA										
	FILTER	Pi network											
PROTECTION	Fuse recommended												
PROTECTION (Note. 5)	OVER CURRENT	110% ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	All output equipped with short circuit Protection type : Hiccup mode, recovers automatically after fault condition is removed											
ENVIRONMENT	WORKING TEMP.	-40 ~ +71℃ (Refer to "Derating Curve")											
	WORKING HUMIDITY	20% ~ 90% RH non-condensing											
	STORAGE TEMP., HUMIDITY	-40 ~ +105℃, 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03% / ℃ (0 ~ 50℃)											
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes											
SAFETY & EMC	SAFETY STANDARDS	EAC TP TC 020/2011approved											
	WITHSTAND VOLTAGE	I/P-O/P: 1.5KVDC											
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25℃ / 70% RH											
	EMC EMISSION	Compliance to BS EN/EN55032 Class A, FCC part 15 Class A, EAC TP TC 020											
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8, light industry level, criteria A, EAC TP TC 020											
OTHERS	MTBF	300Khrs min. MIL-HDBK-217F(25℃)											
	DIMENSION	50.8*25.4*11.27 mm or 2***1**0.44" inch (L*W*H)											
	PACKING	31.2g ; 10pcs/per tube, 400pcs/40 tube/per carton											

■ Mechanical Specification

Unit:mm(inch)

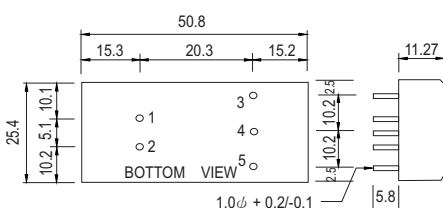


Tolerance .X or .XX= ±0.5mm

■ Pin Configuration

Pin No.	Output
1	+Vin
2	-Vin
3	+Vout
4	No Pin
5	-Vout

■ Derating Curve

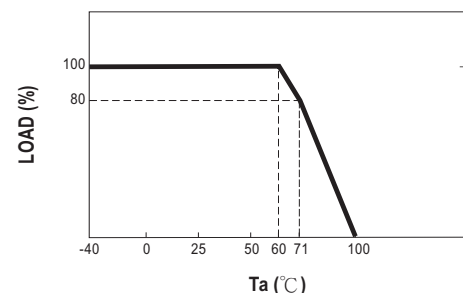

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
 - 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
 - 3.Line regulation is measured from low line to high line at rated load.
 - 4.Load regulation is measured from 10% to 100% rated load.
 - 5.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.
- ※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

Packing

Standard Tube Packing	MPQ Per Tube (PCS)	One Tube G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm  Tube Nails Product 289 54 22.7 7 Tube pattern  CARTON L600 x W230 x H220	10	400g	400	16.8Kg

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>