



Наличие и актуальные цены на

SPA02A-12

<https://www.mean-well.ru/store/SPA02A-12/>



Features :


- 2:1 wide input range
- 4:1 wide input range (A / B Type Only)
- 1000VDC I/O isolation
- 3000VDC I/O isolation (Option)
- Built-in remote ON/OFF control
- Built-in EMI filter
- Protections: Short circuit / Overload
- Cooling by free air convection
- Single in line package
- 100% full load burn-in test
- Low cost / High reliability
- Modified models available: output 3.3V/9V
- 2 years warranty



SPECIFICATION

ORDER NO.		SPA02E-05	SPA02A-05	SPA02B-05	SPA02C-05	SPA02E-12	SPA02A-12	SPA02B-12	SPA02C-12	SPA02E-15	SPA02A-15	SPA02B-15	SPA02C-15	
OUTPUT	DC VOLTAGE	5V				12V				15V				
	CURRENT RANGE	40 ~ 400mA				15 ~ 150mA		17 ~ 167mA			12 ~ 120mA		13 ~ 133mA	
	RATED POWER	2W				1.8W		2W			1.8W		2W	
	RIPPLE & NOISE (max.) Note.2	60mVp-p				60mVp-p				60mVp-p				
	LINE REGULATION Note.3	±0.5%												
	LOAD REGULATION Note.4	±0.5%												
	VOLTAGE ACCURACY	±2.0%												
	SWITCHING FREQUENCY	100KHz min.												
INPUT	VOLTAGE RANGE	E: 4.5 ~ 9VDC A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC												
	EFFICIENCY (Typ.)	71%	76%	76%	74%	74%	80%	80%	82%	76%	80%	80%	78%	
	DC CURRENT	Full load E: 600mA A: 225mA B: 115mA C: 60mA												
		No load E: 50mA A: 25mA B: 15mA C: 8mA												
	FILTER	Capacitor Type												
	REMOTE CONTROL	Power ON : R.C. ~ -Vin < 1VDC or open ; Power OFF : R.C. ~ -Vin > 4VDC												
	PROTECTION	Fuse recommended												
PROTECTION (Note. 5)	OVERLOAD	150 ~ 250% rated output power												
		Protection type : Recovers automatically after fault condition is removed												
	SHORT CIRCUIT	All output equipped with short circuit												
		Protection type : Recovers automatically after fault condition is removed												
ENVIRONMENT	WORKING TEMP.	-40 ~ +85℃ (Refer to "Derating Curve")												
	WORKING HUMIDITY	20% ~ 90% RH non-condensing												
	STORAGE TEMP., HUMIDITY	-40 ~ +105℃, 10 ~ 95% RH												
	TEMP. COEFFICIENT	±0.05% / °C (0 ~ 50℃)												
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes												
SAFETY	SAFETY STANDARDS	EAC TP TC 004 approved												
	WITHSTAND VOLTAGE	I/P-O/P: 1KVDC												
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25℃ / 70% RH												
	ISOLATION CAPACITANCE	80pF max.												
	EMC EMISSION	Compliance to EN55032 Class B, FCC part 15 Class B, EAC TP TC 020												
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8 light industry level, criteria A, EAC TP TC 020												
OTHERS	MTBF	600Khrs min. MIL-HDBK-217F(25℃)												
	DIMENSION	21.8*9.2*11.1mm or 0.86**0.36**0.44" inch (L*W*H)												
	WEIGHT	4.8g												


Mechanical Specification

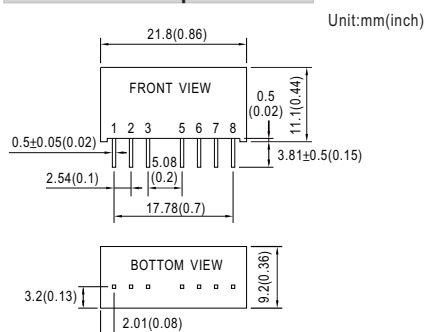

Pin Configuration

Pin No.	Output
1	-Vin
2	+Vin
3	R.C.
5	N.C.
6	+Vout
7	-Vout
8	N.C.

Derating Curve

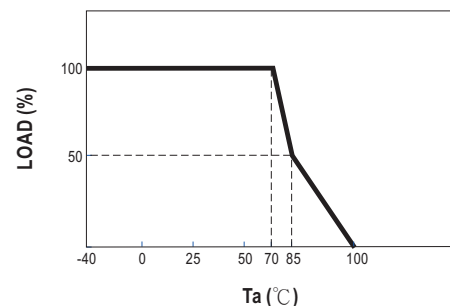

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
 - 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
 - 3.Line regulation is measured from low line to high line at rated load.
 - 4.Load regulation is measured from 10% to 100% rated load.
 - 5.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.
- ※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>