



Наличие и актуальные цены на

U65S106-P2J

<https://www.mean-well.ru/store/U65S106-P2J/>



80W AC-DC Single Output Desktop

U65S series



■ Features :

- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Full output 12~48V safety approval
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- Fix switching frequency and regulation
- Topology: PWM 3882 circuit
- With power ON/OFF switch(option)
- LED indicator for power on
- Approvals: UL / CUL / TUV / CB / CE
- 2 years warranty




SPECIFICATION


ORDER NO.		U65S105-P2J	U65S106-P2J	U65S107-P2J	U65S108-P2J	U65S109-P2J	U65S111-P2J
OUTPUT	SAFETY MODEL NO.	SPU65-105	SPU65-106	SPU65-107	SPU65-108	SPU65-109	SPU65-111
	DC VOLTAGE Note.2	12V	15V	18V	24V	29V	48V
	RATED CURRENT	6.66A	5.33A	4.44A	3.33A	2.75A	1.66A
	CURRENT RANGE	0~6.66A	0~5.33A	0~4.44A	0~3.33A	0~2.75A	0~1.66A
	RATED POWER	80W	80W	80W	80W	80W	80W
	RIPPLE & NOISE (max.) Note.3	100mVp-p	100mVp-p	120mVp-p	150mVp-p	180mVp-p	240mVp-p
	VOLTAGE ADJ. RANGE	Fixed					
	VOLTAGE TOLERANCE Note.4	±4.0%	±3.0%	±3.0%	±2.0%	±2.0%	±2.0%
	LINE REGULATION Note.5	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
INPUT	LOAD REGULATION Note.6	±3.5%	±2.5%	±2.0%	±1.5%	±1.5%	±1.0%
	SETUP, RISE, HOLD UP TIME	800ms, 50ms, 16ms at full load					
	VOLTAGE RANGE	95 ~ 264VAC 140 ~ 370VDC					
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	75%	76%	77%	78%	80%	81%
	AC CURRENT	1.9A / 100VAC					
PROTECTION	INRUSH CURRENT (max.)	40A / 230VAC					
	LEAKAGE CURRENT (max.)	0.75mA / 240VAC					
	OVERLOAD	110 ~ 160% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed					
ENVIRONMENT	OVER VOLTAGE	110 ~ 140% rated output voltage Protection type : Shut down o/p voltage, re-power on to recover					
	WORKING TEMP.	0 ~ +40℃ (Refer to output load derating curve)					
	WORKING HUMIDITY	20% ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-20 ~ +85℃, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50℃)					
SAFETY & EMC (Note. 7)	VIBRATION	10 ~ 500Hz, 2G 3AXES 10min./1cycle, period for 60min. each along X, Y, Z axes					
	SAFETY STANDARDS	UL1950, EN60950-1 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC, I/P-FG:1.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH					
	EMI CONDUCTION & RADIATION	Compliance to EN55022(CISPR22) class B					
	HARMONIC CURRENT	Compliance to EN61000-3-2,3					
OTHERS	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, light industry level, criteria A					
	MTBF	100K hrs min. MIL-HDBK-217F (25℃)					
	DIMENSION	168*78.5*44.5mm (L*W*H)					
CONNECTOR	PACKING	0.75kg; 25pcs / 19kg / CARTON					
	PLUG	Standard type P2J: 2.1φ * 5.5φ * 11mm, center positive for stock ; Other type available by customer requested					
	CABLE	SPT-2 16AWG 6FT for 12V; SPT-1 18AWG 6FT for 15 ~ 48V; Other type available by customer requested					
NOTE		1.All parameters are specified at 230VAC input, rated load, 25℃ 70% RH Ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.Load regulation is measured from 0% to 100% rated load. 7.The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.					

Mechanical Specification

Unit:mm

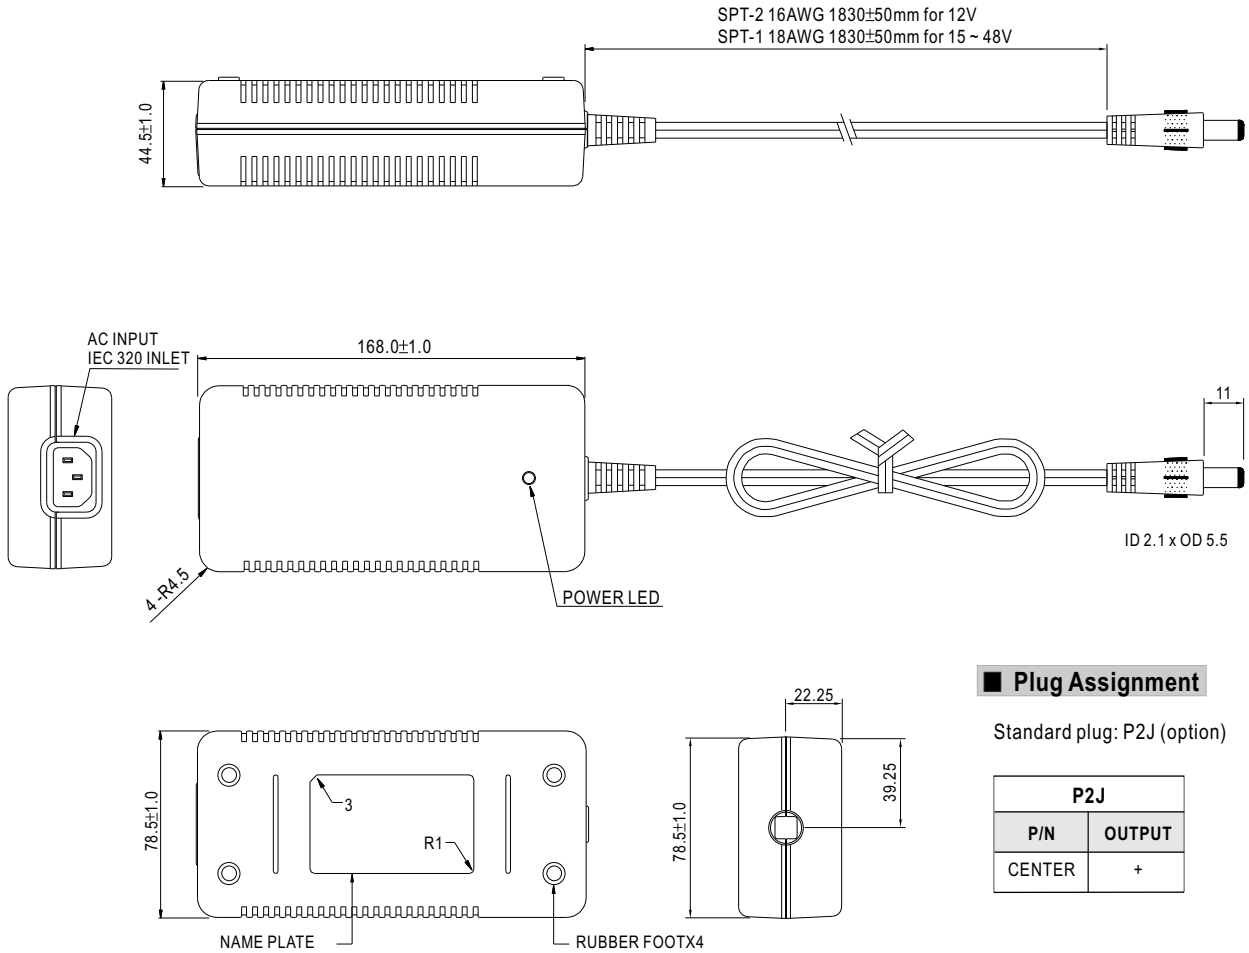

Derating Curve

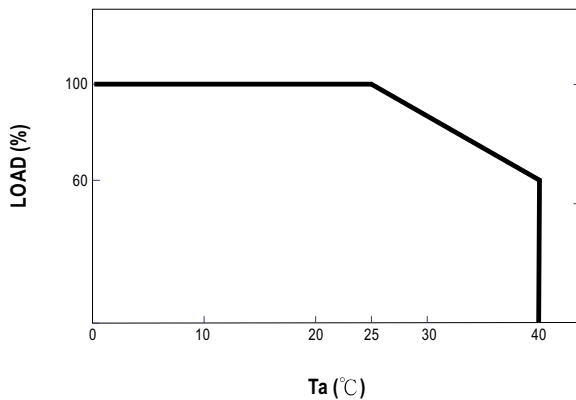

Static Characteristics

