



#### Features:

- Protections:Short circuit/Over load/Over voltage
- Cooling by free air convection
- · LED indicator for power on
- 100% full load burn-in test
- All using 105°C long life electrolytic capacitors
- Withstand 300VAC surge input for 5 second
- High operating temperature up to 70°C
- · Withstand 5G vibration test
- High efficiency, long life and high reliability
- 3 years warranty

### **SPECIFICATION**



MODEL		RT-125A		RT-125B			RT-125C			RT-125D			
	OUTPUT NUMBER	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3
	DC VOLTAGE	5V	12V	-5V	5V	12V	-12V	5V	15V	-15V	5V	24V	12V
	RATED CURRENT	12A	5.5A	1A	12A	5A	1A	10A	4.5A	1A	8A	3A	2A
	CURRENT RANGE Note.	6 2 ~ 15A	0.5 ~ 6A	0.1 ~ 1A	2 ~ 15A	0.5 ~ 6A	0.1 ~ 1A	2 ~ 15A	0.5 ~ 6A	0.1 ~ 1A	2 ~ 15A	0.4 ~ 4A	0.1 ~ 2A
	RATED POWER Note.	131W			132W	•	'	132.5W	'	•	136W	•	•
OUTDUT	RIPPLE & NOISE (max.) Note.	2 80mVp-p	120mVp-p	80mVp-p	80mVp-p	120mVp-p	120mVp-p	80mVp-p	150mVp-p	150mVp-p	80mVp-p	150mVp-p	120mVp-p
OUTPUT	VOLTAGE ADJ. RANGE		CH1: 4.75 ~ 5.5V		CH1: 4.75 ~ 5.5V		CH1: 4.75 ~ 5.5V		CH1: 4.75 ~ 5.5V				
	VOLTAGE TOLERANCE Note.	±2.0%	+8,-3%	+6,-10%	±2.0%	+8,-3%	±6.0%	±2.0%	+8,-3%	±6.0%	±2.0%	±5.0%	±6.0%
	LINE REGULATION Note	4 ±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%
	LOAD REGULATION Note.	±1.0%	±3.0%	±6.0%	±1.0%	±3.0%	±6.0%	±1.0%	±3.0%	±6.0%	±1.0%	±3.0%	±6.0%
	SETUP, RISE TIME	500ms, 20	500ms, 20ms/230VAC 1200ms, 30ms/115VAC at full load										
	HOLD TIME (Typ.)	36ms/230	36ms/230VAC 30ms/115VAC at full load										
INPUT	VOLTAGE RANGE	88 ~ 132V	88 ~ 132VAC / 176 ~ 264VAC selected by switch 248 ~ 373VDC(Withstand 300VAC surge for 5sec. Without damage)								je)		
	FREQUENCY RANGE	47 ~ 63Hz	47 ~ 63Hz										
	EFFICIENCY(Typ.)	79%			80%			81%			82%		
	AC CURRENT (Typ.)	3A/115VAC 2A/230VAC											
	INRUSH CURRENT (Typ.)	COLD START 40A/230VAC											
	LEAKAGE CURRENT	<2mA / 24	<2mA / 240VAC										
		110 ~ 150% rated output power											
PROTECTION	OVER LOAD	Protection type: Hiccup mode, recovers automatically after fault condition is removed											
PROTECTION	OVED VOLTACE	CH1: 5.75 ~ 6.75V											
	OVER VOLTAGE	Protection type: Hiccup mode, recovers automatically after fault condition is removed											
	WORKING TEMP.	-25 ~ +70	-25 ~ +70°C (Refer to output load derating curve)										
ENVIRONMENT	WORKING HUMIDITY	20 ~ 90% RH non-condensing											
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)on +5V output											
	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes											
	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 Approved											
	WITHSTAND VOLTAGE	I/P-O/P:3	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC										
SAFETY &	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC											
EMC	EMI CONDUCTION & RADIATION	Complian	Compliance to EN55022 (CISPR22) Class B										
(Note 7)	HARMONIC CURRENT	Compliance to EN61000-3-2,-3											
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN61000-6-2 (EN50082-2) heavy industry level, criteria A											
OTHERS	MTBF	209.3Khrs min. MIL-HDBK-217F (25°C)											
	DIMENSION	199*98*38mm (L*W*H)											
	PACKING	1 0	0.7Kg; 20pcs/14Kg/0.8CUFT										
NOTE	<ol> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by usinsted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> </ol>												


- 3. Tolerance : includes set up tolerance, line regulation and load regulation.
- 4. Line regulation is measured from low line to high line at rated load.
- 5. Load regulation is measured from 20% to 100% rated load, and other output at 60% rated load.
- 6. Each output can work within current range. But total output power can't exceed rated output power.


  7. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets
- 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time.



# ■ Mechanical Specification

Case No. 902A Unit:mm

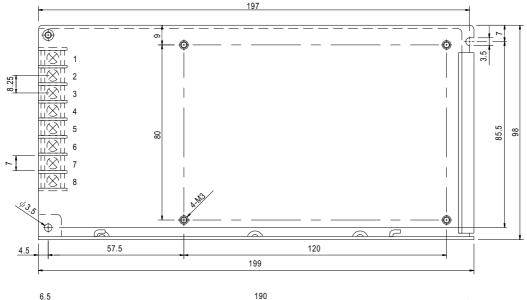

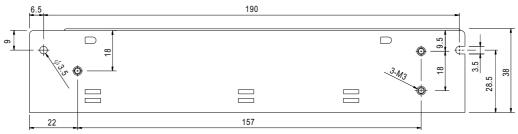

#### Terminal Pin. No Assignment

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment		
1	AC/L	4	NC	7	DC OUTPUT COM		
2	AC/N	5	DC OUTPUT V3	8	DC OUTPUT +V1		
3	FG ≟	6	DC OUTPUT +V2				

## ■ Derating Curve

### **■** Static Characteristics

