




Наличие и актуальные цены на

RPSG-160-24

<https://www.mean-well.ru/store/RPSG-160-24/>

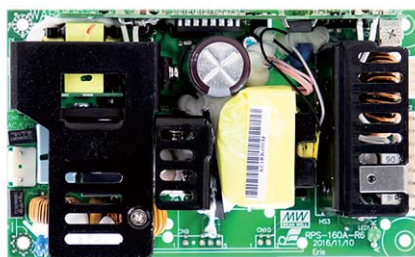

User's Manual



ANSI/AAMI ES60601-1 BS EN/EN60601-1 IEC60601-1




Features

- 5"× 3" compact size
- Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1 and IEC/BS EN/EN60601-1
- Suitable for BF application with appropriate system consideration
- 110W convention, 160W force air
- EMI class B for class I configuration
- No load power consumption under 0.5W by PS-ON control (G model)
- 5Vdc standby output, Power Good, Power Fail ; Remote sense for 5~15V
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Operating altitude up to 3000 meters
- 3 years warranty

Description

RPS-160 is a 160W highly reliable green PCB type medical power supply with a high power density on a 5" by 3" footprint. It accepts 90~264VAC input and offers various models with the output voltages between 5V and 48V. The working efficiency is up to 88% and the extremely low no load power consumption is down below 0.5W. RPS-160 is able to be used for Class I (with FG) system design. The extremely low leakage current is less than 160 μ A. In addition, it conforms to the international medical regulations (2*MOPP) and EMC BS EN/EN55011, perfectly fitting all kinds of BF rated "patient contact" medical system equipment.

Model Encoding

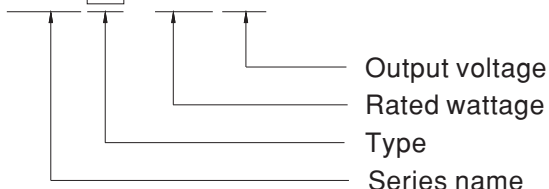RPS**G** - 160 - 5

Applications

- Oral irrigator
- Hemodialysis machine
- Medical monitors
- Sleep apnea devices
- Pumps machine

GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Type	Description	Note
Blank	Without 5Vsb	In stock
G	With 5Vsb & No load power consumption <0.5W	In stock


SPECIFICATION

MODEL	RPS□-160-5		RPS□-160-12		RPS□-160-15		RPS□-160-24		RPS□-160-48			
OUTPUT	DC VOLTAGE		5V		12V		15V		24V		48V	
	RATED CURRENT (20.5CFM)		30A		12.9A		10.3A		6.5A		3.25A	
	CURRENT	Convection	0 ~ 20A		0 ~ 9.1A		0 ~ 7.3A		0 ~ 4.6A		0 ~ 2.3A	
		20.5CFM	0 ~ 30A		0 ~ 12.9A		0 ~ 10.3A		0 ~ 6.5A		0 ~ 3.25A	
	RATED POWER	Convection Note.2	103W		112.2W		112.5W		113.4W		113.4W	
		20.5CFM Note.3	155W		159.8W		159.5W		161W		161W	
	RIPPLE & NOISE (max.) Note.4		80mVp-p		80mVp-p		120mVp-p		120mVp-p		150mVp-p	
	VOLTAGE ADJ. RANGE(main output)		4.5 ~ 5.5V		10.8 ~ 13.2V		13.5 ~ 16.5V		22 ~ 27V		43.2 ~ 52.8V	
	VOLTAGE TOLERANCE Note.5		± 4.0%		± 3.0%		± 3.0%		± 2.0%		± 2.0%	
	LINE REGULATION		± 0.5%		± 0.5%		± 0.5%		± 0.5%		± 0.5%	
LOAD REGULATION		± 1.0%		± 1.0%		± 1.0%		± 1.0%		± 1.0%		
SETUP, RISE TIME		1800ms, 30ms/230VAC 3500ms, 30ms/115VAC at full load										
HOLD UP TIME (Typ.)		20ms/115VAC 25ms/230VAC at full load										
INPUT	VOLTAGE RANGE Note.6		90 ~ 264VAC 127 ~ 370VDC									
	FREQUENCY RANGE		47 ~ 63Hz									
	POWER FACTOR (Typ.)		PF>0.93/230VAC PF>0.98/115VAC at full load									
	EFFICIENCY (Typ.)		86%		87%		87%		87%		88%	
	AC CURRENT (Typ.)		2A/115VAC 1.1A/230VAC									
	INRUSH CURRENT (Typ.)		COLD START 35A/115VAC 70A/230VAC									
	LEAKAGE CURRENT Note.7		Earth leakage current < 160μA/264VAC , Touch current < 100μA/264VAC									
PROTECTION	OVERLOAD		105 ~ 135% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed									
	OVER VOLTAGE		5.7 ~ 6.8V		13.8 ~ 16.2V		17.2 ~ 20.3V		27.6 ~ 32.4V		55.2 ~ 64.8V	
			Protection type : Shut down o/p voltage, re-power on to recover									
	OVER TEMPERATURE		TSW1: Shut down o/p voltage, recovers automatically after temperature goes down									
			TSW2: Shut down o/p voltage, re-power on to recover									
FUNCTION	5V STANDBY (G model)		5Vsb : 5V@0.6A without fan, 0.8A with fan 20.5CFM ; Tolerance ± 2%, ripple : 50mVp-p(max.)									
	PS-ON INPUT SIGNAL (G model)		Power on: PS-ON = "Hi" or " > 2 ~ 5V" ; Power off: PS-ON = "Low" or " < 0 ~ 0.5V"									
	POWER GOOD / POWER FAIL		500ms>PG>10ms PF>1ms									
	REMOTE SENSE		5 ~ 15V									
ENVIRONMENT	WORKING TEMP.		-20 ~ +70℃ (Refer to "Derating Curve")									
	WORKING HUMIDITY		20 ~ 90% RH non-condensing									
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing									
	TEMP. COEFFICIENT		± 0.03%/℃ (0 ~ 50℃)									
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes									
	OPERATING ALTITUDE Note.8		3000 meters									
	SAFETY & EMC (Note 10)	SAFETY STANDARDS		IEC 60601-1:2005+A1+A2, TUV BS EN/ EN 60601-1:2006+A1+A12+A2, ANSI/AAMI ES60601-1:2005+A2 CAN/CSA C22.2 No. 60601-1:2014+A2, EAC TP TC 004 approved; Design refer to BS EN/EN60335-1(by request)								
ISOLATION LEVEL		Primary-Secondary: 2xMOPP, Primary-Earth:1xMOPP, Secondary-Earth:1xMOPP										
WITHSTAND VOLTAGE		I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC										
ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH										
EMC EMISSION		Parameter				Standard				Test Level / Note		
		Conducted emission				BS EN/EN55011 (CISPR11)				Class B		
		Radiated emission				BS EN/EN55011 (CISPR11)				Class B		
		Harmonic current				BS EN/EN61000-3-2				Class A		
		Voltage flicker				BS EN/EN61000-3-3				-----		
EMC IMMUNITY		BS EN/EN55035, BS EN/EN60601-1-2										
		Parameter				Standard				Test Level / Note		
		ESD				BS EN/EN61000-4-2				Level 4, 15KV air ; Level 4, 8KV contact		
		RF field susceptibility				BS EN/EN61000-4-3				Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz)		
		EFT bursts				BS EN/EN61000-4-4				Level 3, 2KV		
		Surge susceptibility				BS EN/EN61000-4-5				Level 4, 4KV/Line-FG ; 2KV/Line-Line		
		Conducted susceptibility				BS EN/EN61000-4-6				Level 3, 10V		
		Magnetic field immunity				BS EN/EN61000-4-8				Level 4, 30A/m		
		Voltage dip, interruption				BS EN/EN61000-4-11				100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods		
		OTHERS	MTBF		2082.3K hrs min. Telcordia SR-332 (Bellcore) ; 234.5K hrs min. MIL-HDBK-217F (25℃)							
DIMENSION (L*W*H)			127*76.2*34.6mm or 5" * 3" * 1.36" inch									
PACKING			0.33Kg; 36pcs/12.9Kg/0.96CUFT									


NOTE

- All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
- The rated power includes 5Vsb @ 0.6A.
- The rated power includes 5Vsb @ 0.8A.
- Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ F parallel capacitor.
- Tolerance : includes set up tolerance, line regulation and load regulation.
- Derating may be needed under low input voltages. Please check the derating curve for more details.
- Touch current was measured from primary input to DC output.
- The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- HS1,HS2 & HS3 can not be shorted.
- The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)
- ※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>


Block Diagram

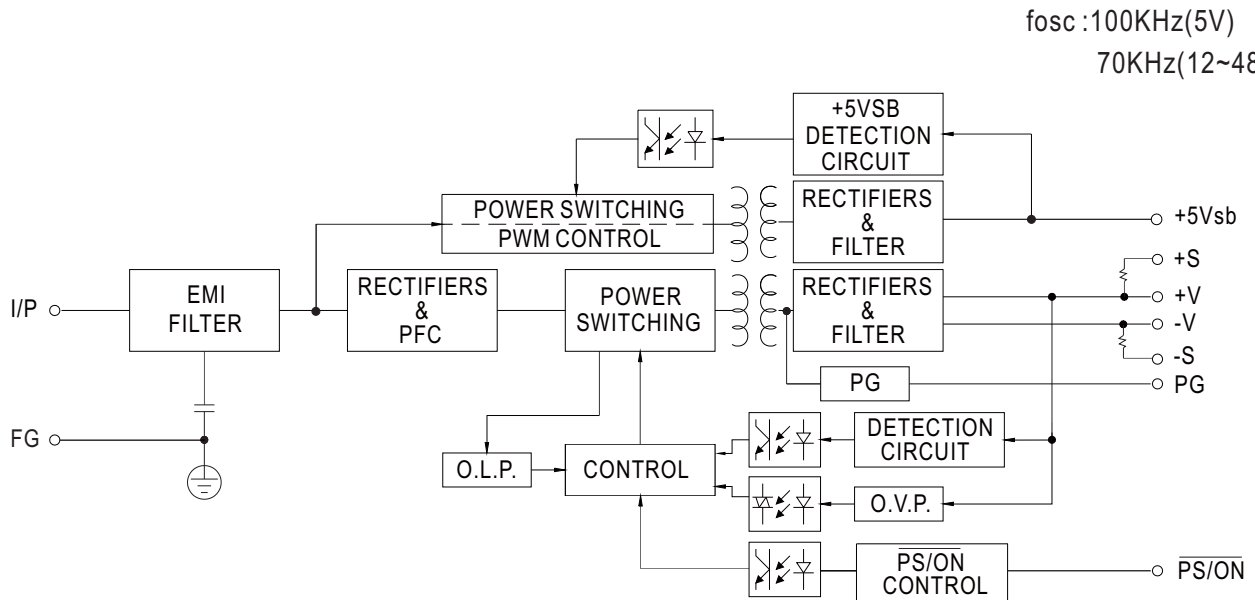

Derating Curve

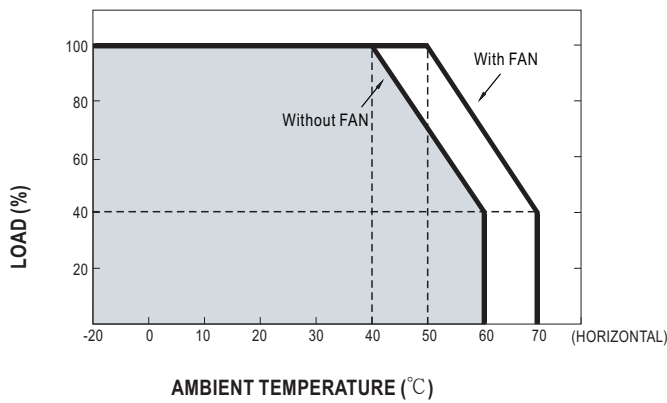


Output Derating VS Input Voltage

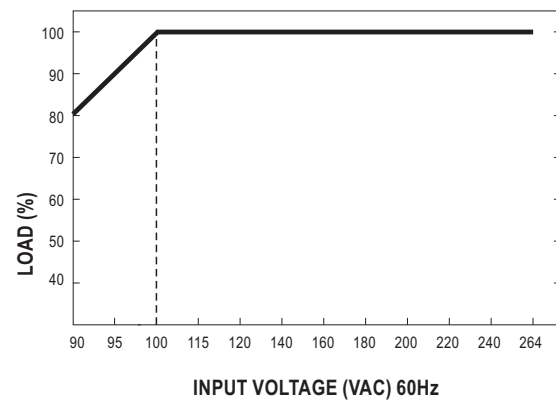

Mechanical Specification

Unit:mm

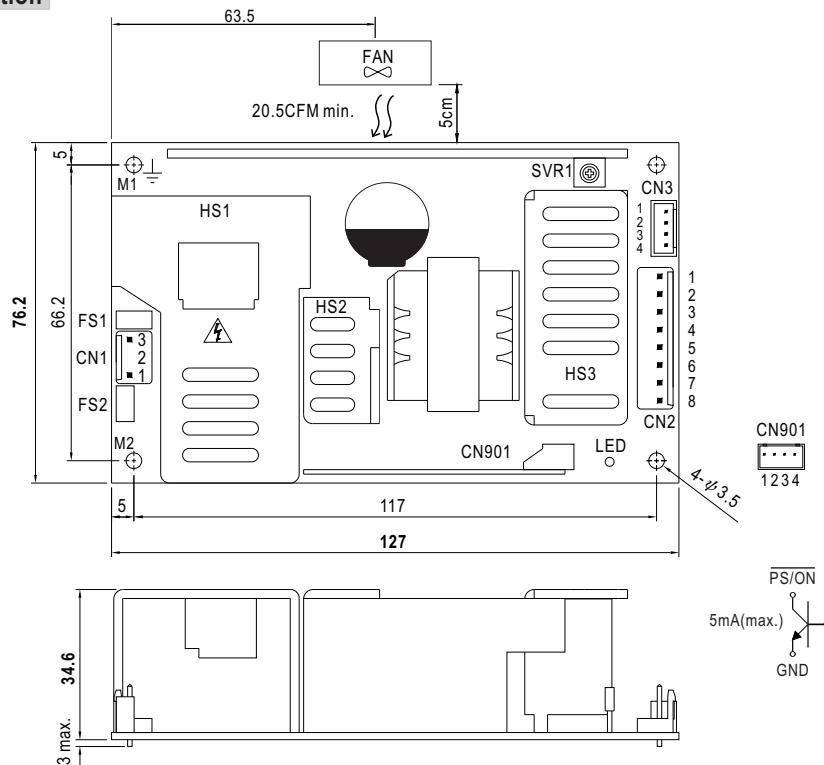

AC Input Connector (CN1) : JST B3P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	AC/N	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
2	No Pin		
3	AC/L		

Power Good Connector(CN3):JST B4B-XH or equivalent

Pin No.	Status	Mating Housing	Terminal
1	PG	JST XHP or equivalent	JST SXH-001T-P0.6 or equivalent
2	GND		
3	-S		
4	+S		

DC Output Connector (CN2) : JST B8P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1,2,3,4	+V	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
5,6,7,8	-V		

5VSB Connector(CN901) : JST B-XH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	PS/ON	JST XHP or equivalent	JST SXH-001T or equivalent
2,4	GND		
3	5VSB		

⏏ : Grounding Required



- 1.HS1,HS2,HS3 cannot be shorted.
- 2.M1 is safety ground. For better EMC performance,Please secure an electrical connection between M1,M2, and chassis grounding.

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>