



Наличие и актуальные цены на

SUS01N-12

<https://www.mean-well.ru/store/SUS01N-12/>



Features :

- 1500VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package
- 100% burn-in test
- Low cost / High reliability
- Approvals: FCC / EAC / CE / UKCA
- 2 years warranty

GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>



SELECTION GUIDE

ORDER NO.	SUS01L-05	SUS01M-05	SUS01N-05	SUS01O-05	SUS01L-09	SUS01M-09	SUS01N-09	SUS01O-09
DC OUTPUT VOLTAGE	5V				9V			
OUTPUT CURRENT RANGE	0 ~ 200mA				0 ~ 111mA			
EFFICIENCY	73%	74%	72%	74%	75%	79%	80%	77%


ORDER NO.	SUS01L-12	SUS01M-12	SUS01N-12	SUS01O-12	SUS01L-15	SUS01M-15	SUS01N-15	SUS01O-15
DC OUTPUT VOLTAGE	12V				15V			
OUTPUT CURRENT RANGE	0 ~ 84mA				0 ~ 67mA			
EFFICIENCY	78%	82%	83%	83%	79%	82%	83%	83%

SPECIFICATION

OUTPUT	RATED POWER	1W						
	RIPPLE & NOISE (max.) Note.2	100mVp-p						
	LINE REGULATION Note.3	±1.2% for 1% input variation						
	LOAD REGULATION Note.4	±8.0%						
	VOLTAGE ACCURACY	±2.0%						
	SWITCHING FREQUENCY	50KHz min.						
INPUT	VOLTAGE RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	43.2 ~ 52.8V	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V
	NORMAL VOLTAGE	5V	12V	24V	48V	5V	12V	24V
	INPUT CURRENT	Full load	280mA	112mA	55mA	28mA	280mA	112mA
		No load	21mA	11mA	10mA	3mA	21mA	11mA
	FILTER	Capacitor type						
	PROTECTION	Fuse recommended						
PROTECTION	OVERLOAD	Momentary						
		Protection type : Broken						
	SHORT CIRCUIT	Momentary						
		Protection type : Broken						
ENVIRONMENT	WORKING TEMP.	-25 ~ +71°C (Refer to "Derating Curve")						
	WORKING HUMIDITY	20% ~ 90% RH non-condensing						
	STORAGE TEMP., HUMIDITY	-25 ~ +105°C, 10 ~ 95% RH						
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)						
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes						
SAFETY & EMC	SAFETY STANDARDS	EAC TP TC 020/2011 approved						
	WITHSTAND VOLTAGE	I/P-O/P: 1.5KVDC						
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH						
	ISOLATION CAPACITANCE	80pF max.						
	EMC EMISSION	Compliance to BS EN/EN55032 Class B, FCC part 15 Class B, EAC TP TC 020						
OTHERS	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8, light industry level, criteria A, EAC TP TC 020						
	MTBF	700khrs min. MIL-HDBK-217F(25°C)						
	DIMENSION	22.6*9.9*8.9mm or 0.89**0.39**0.35" inch (L*W*H)						
	PACKING	3.1g ; 22pcs/per tube, 3080pcs/140 tube/per carton						

Mechanical Specification


Unit: mm (inch)



Pin Configuration

Pin No.	Output
1 & 16	+Vin
6 & 11	-Vout
7 & 10	+Vout
8 & 9	-Vin



Derating Curve

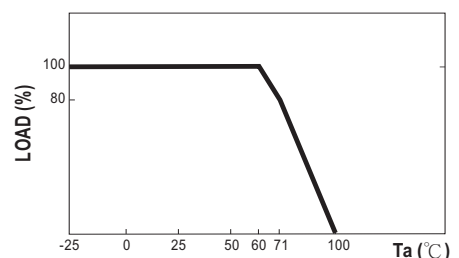

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
 - 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
 - 3.Line regulation is measured from low line to high line at rated load.
 - 4.Load regulation is measured from 20% to 100% rated load.
- ※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

Packing

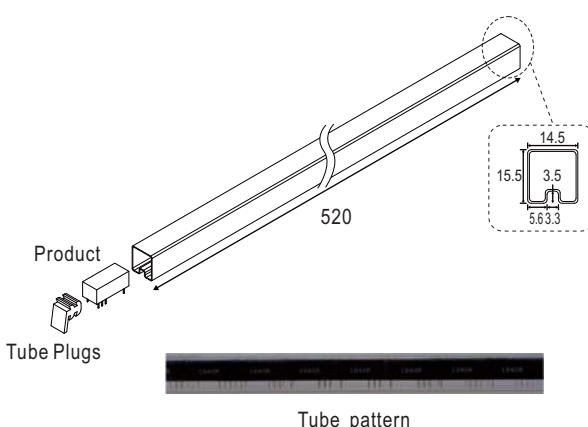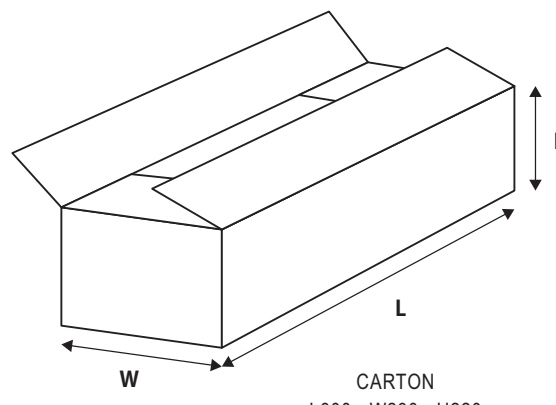Standard Tube Packing	MPQ Per Tube (PCS)	One Tube G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
<p>Unit : mm</p>  <p>Product</p> <p>Tube Plugs</p> <p>520</p> <p>14.5</p> <p>15.5</p> <p>3.5</p> <p>563.3</p> <p>Tube pattern</p>  <p>CARTON L600 x W230 x H220</p>	22	110g	3080	16.2Kg

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>